



USH
GERMANY



Manufacturer

CATALOGUE
BITS & BITHOLDERS
DRILL BITS



Made
in
Germany

CONTENT

SCREW BITS

DIATIN®

P10



ISOTIN®

P12



INDUSTRY

P14



STAINLESS STEEL

P28



SAFETY BIT

P15



REDUCED SHANK

P18



5/16 SHANK

P24



SPECIFIC BIT

P26



LONG

P20



DOUBLE BIT

P22



BITHOLDER

P30



BLISTER RANGE

P38



SOCKET

P40



SCREWDRIVER

P42



DRILL BITS

HAMMER
DRILL BIT



POINTED &
FLAT CHISEL



DIAMOND




MASONRY



SPECIFIC




HSS



HOLE SAW



EXTRACTOR
SCRIBING IRON

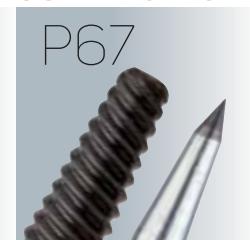

BIT SET



DISPLAY



DRILL SET



PACKAGING



SCREW BITS GUIDE



PZ
Pozidriv
DIN 5260



PH
Phillips
DIN 5260




PZ
Pozidriv ACR
DIN 5260



PH
Phillips ACR
DIN 5260



T
Torx®

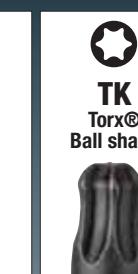

TK
Torx®
Ball shape



T
Torx Plus®



TT
Torx® Tamper




SL
Slot
DIN 3127



HEX
Femelle hexagon
DIN 7426



HEX K
Femelle hexagon
Ball shape
DIN 7426

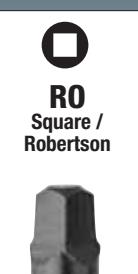

RO
Square /
Robertson



TQS
Torq Set®




TW
TRI-WING®



TW
XZN
Triple square



SP
Spanner

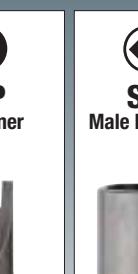

SW
Male
hexagon



Male
square 1/4"
DIN 3121

MANUFACTURER

USH SINCE 1976

USH is a company created in 1976. The factory is located in the heart of Germany, close to major German industrial centers of the Ruhr. It has a strong metallurgical experience and from the beginning USH has been specializing in the manufacture of tools for "power-driven tools".

Today USH has become one of the largest bit holder producers in Europe, known for their reliability and strength. The company has developed many models of screwdriver bits and other accessories such as screw extractors and carbide scribes.

USH manufactures its complete range in Germany with special care to create and develop high quality tools.

USH supports customers with a complete product offer, through marketing and merchandising concept suitable for all retail situations.





SCREW BITS


TOP QUALITY

TORSION GEOMETRY


LONG LIFE GARANTY

The **torsion bit** is excellently suited for cushioning load peaks. If, for instance, the screw head makes contact with a solid metal surface, a torsion bit will master this situation without any problem. The load peak is cushioned by the torsion zone, thereby avoiding permanent distortion or deformation of the bit point.


This guarantees a longer tool life. Furthermore, the risk that the bits slips out of the screw head is significantly reduced, and premature wear as well as damage to the workpiece is avoided. In general, "soft" screw fastening relates to timber, where fastening starts by applying little force which is then steadily and uniformly increased. The more threads there are, the greater the force that must be applied. The same applies to plastic, to which, however, in view of the diversity of materials, general rules cannot be applied. Therefore, a standard bit is generally sufficient. Breaking of the bit point due to sudden load peaks must not be feared. If in "soft applications" the service life has to be increased, greater hardness is more important than the tenacity of the bit. A higher hardness reduces the wear of the bit in the areas where it is attacked, i.e. rounding of edges and indentations in the areas of wear are significantly reduced.

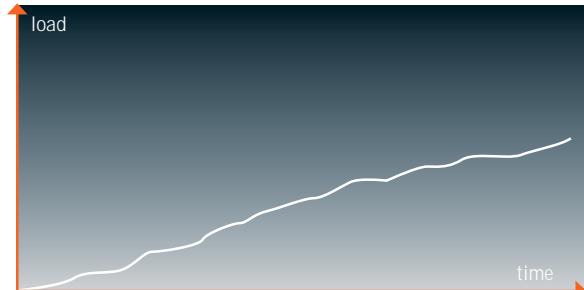

Hard screw fastening relates to the fastening of screws with a metric thread in a solid metal piece but also in sheet metal. The flat underside of the screw head comes into contact with the flat, non-elastic surface of the solid metal piece which results in a sudden load peak. Due to the low torque, which is required for fastening a screw, the different forces, which come into effect are extreme. Another case of "hard" fastening relates to self-tapping screws fastened in a solid metal piece but also in sheet metal. Also in this case, a sudden load peak occurs, but the difference of forces that act on the components is not as extreme as in the application described above. In this case, the advantage of the higher torque, which can be transmitted by the torsion bit, plays an important role.

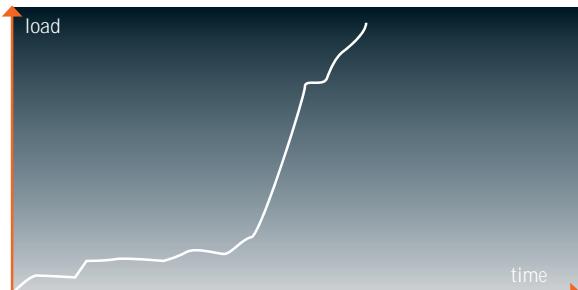


Furthermore, torsion bits are superior to standard bits when screws are to be fastened into layers of materials with different degrees of hardness, where alternating loads, which are similar to load peaks are encountered.

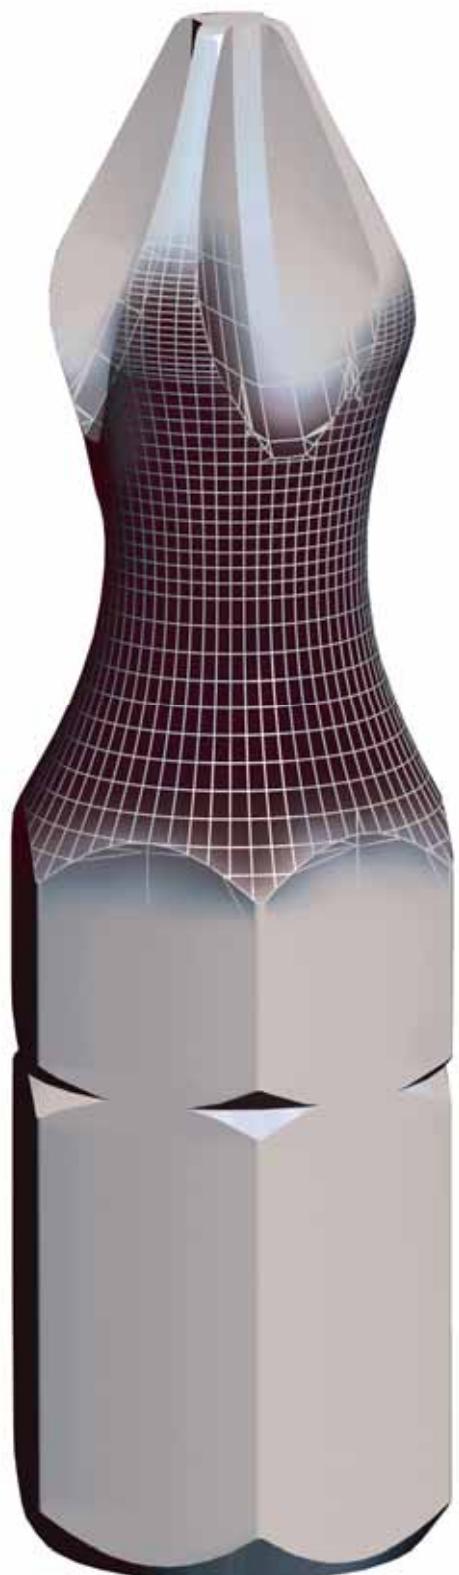

HIGH SPEED COLD FORGING

HIGH PRECISION

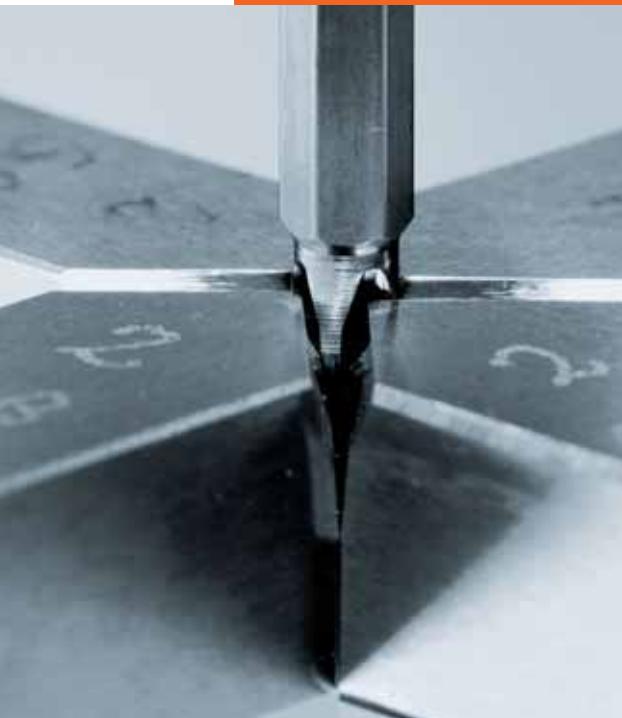

USH uses the self developed **High-Speed-Cold-Forging** process for the manufacturing of screwdrivers. The bit is given its shape by means of cold forging. That manufacturing process gives the bits high precision, greater mechanical strength and a very clean surface condition.

ISOTIN® TOP HARDNESS

With a double titanium layer a surface hardness of 3,000 Vickers is obtained in the case of ISOTIN® bits (standard TIN bit approx. 2,500 Vickers). By an optimised multi-stage hardening and tempering process under vacuum, the bit achieves a core toughness, which is demonstrated by the torque which is up to 120% higher than that of uncoated bits (compared to a Ph 2 bit as per DIN standard). Optimised core toughness and a thicker wearing coat **give a longer tool life** than that of a TIN bit with standard coating. As a result of the torsional shape, the bit is suitable **for all delicate applications** in both hard and soft materials.



screw



DIATIN® THE PERFECT GRIP

DiaTin bit is in effect a torsion bit provided with a TiN (titanium nitride) coating. An additional DLC (**diamond like carbon**) coating is applied to the TiN coating.

This special coating in the engaging area of the tip ensures a high degree of grip between the bit and the screw which clearly **reduces the cam-out value**.

In combination with the torsion form, the bit is suitable for challenging applications for both hard and soft screw fastening.

BITHOLDER TOP QUALITY

BIG II HIGHLY EFFICIENT

Firm connection between the screw and the magnetic holder.

Screw fastening becomes highly efficient, as the screw is firmly held.

Insert the bit, the bit is held on the magnet and is retained.


Actuate the guide sleeve until the annular magnet is in contact with the screw head; almost any bit dimension can be used (Ph / Pz / Torx®).

The surface of the screw head is held on the annular magnet incorporated in the sleeve.

The screw is safely held and tilting or slipping is almost impossible.

The screw has virtually become one with the magnetic holder.

The screw is retained on the BiG magnetic holder with a force of more than 1kg.

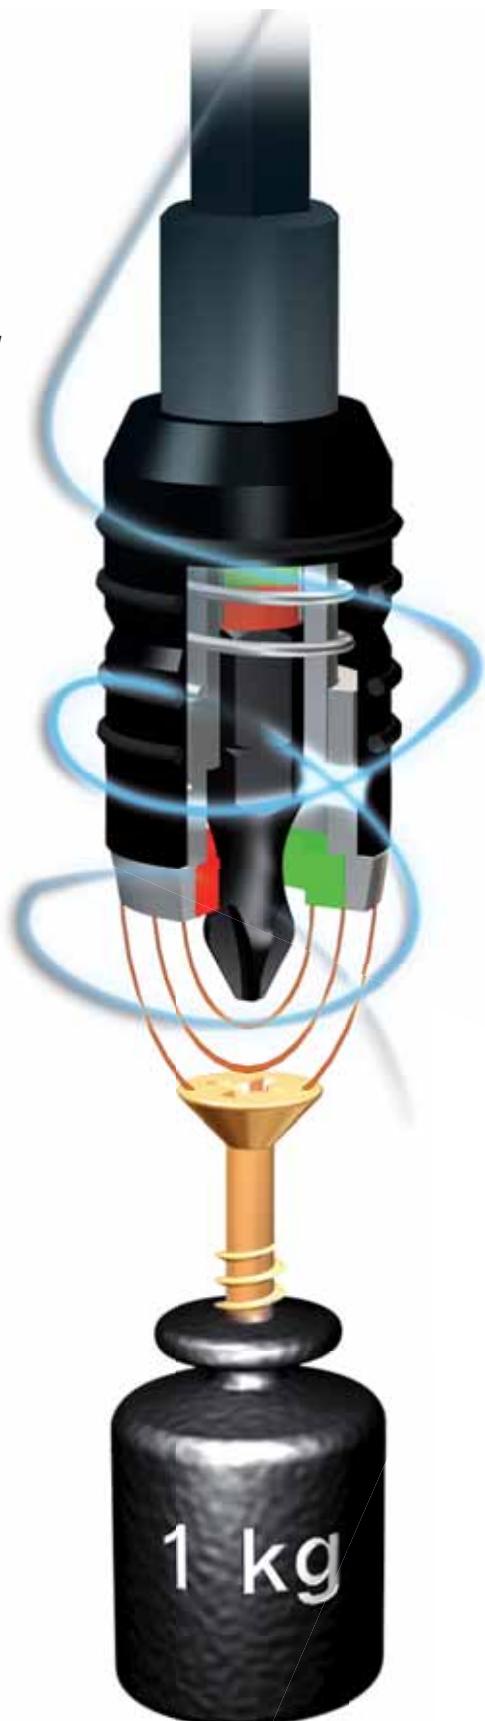

FOX II

FASTER

Quick change in one-hand operation.

Fox II bitholder allows the insertion of the bit without retracting the sleeve.


In order to remove the bit, the sleeve is slightly pulled backwards, and the bit will "jump" out of the holder and can be taken out without any effort.

Thus, Fox II enables rapid bit change in one-hand operation. With the aid of the neodymium magnet and a retaining pin a safe clamping is achieved. As a result the bit is "locked" in the holder and unintentional slipping out or becoming jammed in the screw is prevented.



BIG & BIG MINI SCREW DEEP ADJUSTMENT

Ideal for: Joinery and carpentry, door and window installation, interior works (sandwich type plaster boards and hard particle boards).

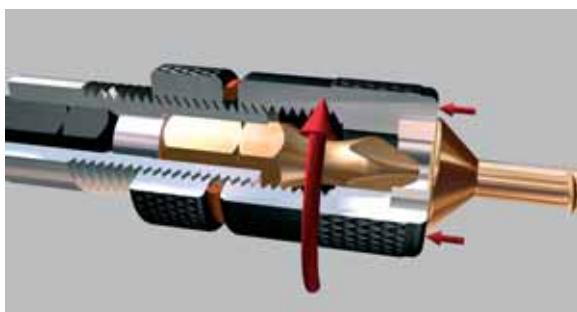

SPACER STOPVIS

The spacer ring and deep adjustment limit the penetration of the screw in the material.

Screw is perfectly in line with the material which is not damaged for a perfect finish.



DIATIN®

SUPERIOR QUALITY

**ABSOLUTE
PROFESSIONAL
QUALITY!**



Features

- The DiaTiN coating is a combination of TiN coating with DLC (Diamond Like Carbon).
- Double titanium layer.
- Surface hardness of 3,000 Vickers (standard TiN bit approx. 2,500 Vickers).
- Torsion geometry.
- Quick lock attachment.
- Rust proof protection.



TORSION FLEX



1/4" DIN 3126 C 6,3
1/4" DIN 3126 E 6,3

Benefits

- DLC coating improves wear resistance and lengthens the life of the bit.
- It also ensures perfect holding between bit and screw, thus keeping the bit from slipping and protecting screw heads.
- It reduces the force required for implementation.
- Higher torsion resistance.
- Greater speed of implementation on the job.
- Quick lock attachment for optimum holding in the chuck.
- The torsion geometry combined with the TiN coating increases the resistance to tightening torque.
- Fully compatible with PL, PH, PZ, TX type screw.

LENGTH: 25 mm

DIN 3126 C 6,3



 **POZIDRIV - DIN 5260**

| Taille | Lg | Ref. | Gencod | Pack |
|-----------------|----|-------------|---------------|------|
| 5 PIECES | | | | |
| PZ1 | 25 | UUSE0032360 | 4013769341044 | A |
| PZ2 | 25 | UUSE0032361 | 4013769277466 | A |
| PZ3 | 25 | UUSE0032362 | 4013769334558 | A |

| Taille | Lg | Ref. | Gencod | Pack |
|------------------|----|-------------|---------------|------|
| 10 PIECES | | | | |
| PZ1 | 25 | UUSG0032360 | 4013769301130 | A |
| PZ2 | 25 | UUSG0032361 | 4013769301147 | A |
| PZ3 | 25 | UUSG0032362 | 4013769301154 | A |

| Taille | Lg | Ref. | Gencod | Pack |
|------------------|----|-------------|---------------|------|
| 25 PIECES | | | | |
| PZ2 | 25 | UUSL0032361 | 4013769434944 | A |



 **PHILLIPS - DIN 5260**

| Taille | Lg | Ref. | Gencod | Pack |
|-----------------|----|-------------|---------------|------|
| 5 PIECES | | | | |
| PH1 | 25 | UUSE0032341 | 4013769341020 | A |
| PH2 | 25 | UUSE0032342 | 4013769334541 | A |
| PH3 | 25 | UUSE0032344 | 4013769341037 | A |

| Taille | Lg | Ref. | Gencod | Pack |
|------------------|----|-------------|---------------|------|
| 10 PIECES | | | | |
| PH1 | 25 | UUSG0032341 | 4013769301109 | A |
| PH2 | 25 | UUSG0032342 | 4013769301116 | A |
| PH3 | 25 | UUSG0032344 | 4013769301321 | A |

| Taille | Lg | Ref. | Gencod | Pack |
|------------------|----|-------------|---------------|------|
| 25 PIECES | | | | |
| PH2 | 25 | UUSL0032342 | 4013769434852 | A |




 **TORX®**

| Taille | Lg | Ref. | Gencod | Pack |
|------------------|----|-------------|---------------|------|
| 5 PIECES | | | | |
| T10 | 25 | UUSE0032393 | 4013769352538 | A |
| T15 | 25 | UUSE0032394 | 4013769349521 | A |
| T20 | 25 | UUSE0032395 | 4013769349811 | A |
| T25 | 25 | UUSE0032396 | 4013769340863 | A |
| T30 | 25 | UUSE0032398 | 4013769349784 | A |
| T40 | 25 | UUSE0032399 | 4013769347138 | A |
| 10 PIECES | | | | |
| T10 | 25 | UUSG0032393 | 4013769301161 | A |
| T15 | 25 | UUSG0032394 | 4013769301178 | A |
| T20 | 25 | UUSG0032395 | 4013769301185 | A |
| T25 | 25 | UUSG0032396 | 4013769301192 | A |
| T30 | 25 | UUSG0032398 | 4013769301208 | A |
| T40 | 25 | UUSG0032399 | 4013769301215 | A |
| 25 PIECES | | | | |
| T20 | 25 | UUSL0032395 | 4013769434951 | A |
| T25 | 25 | UUSL0032396 | 4013769434968 | A |
| T30 | 25 | UUSL0032398 | 4013769434975 | A |



SLOT - DIN 3127

| Taille | Lg | Ref. | Gencod | Pack |
|------------------|----|-------------|---------------|------|
| 5 PIECES | | | | |
| SL0,6x4,5 | 25 | UUSE0032303 | 4013769434869 | A |
| SL0,8x5,5 | 25 | UUSE0032305 | 4013769434876 | A |
| SL1x5,5 | 25 | UUSE0032306 | 4013769434883 | A |
| SL1,2x6,5 | 25 | UUSE0032307 | 4013769434890 | A |
| 10 PIECES | | | | |
| SL0,6x4,5 | 25 | UUSG0032303 | 4013769434906 | A |
| SL0,8x5,5 | 25 | UUSG0032305 | 4013769434913 | A |
| SL1x5,5 | 25 | UUSG0032306 | 4013769434920 | A |
| SL1,2x6,5 | 25 | UUSG0032307 | 4013769434937 | A |

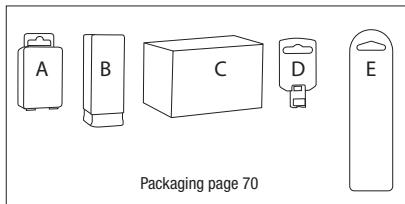

LENGTH: 50 mm

DIN 3126 E 6,3



POZIDRIV - DIN 5260

| Taille | Lg | Ref. | Gencod | Pack |
|------------------|----|-------------|---------------|------|
| 5 PIECES | | | | |
| PZ1 | 50 | UUSE0313630 | 4013769360779 | A |
| PZ2 | 50 | UUSE0313631 | 4013769340894 | A |
| PZ3 | 50 | UUSE0313632 | 4013769360786 | A |
| 10 PIECES | | | | |
| PZ1 | 50 | UUSG0313630 | 4013769435019 | A |
| PZ2 | 50 | UUSG0313631 | 4013769435026 | A |
| PZ3 | 50 | UUSG0313632 | 4013769435033 | A |



PHILLIPS - DIN 5260

| Taille | Lg | Ref. | Gencod | Pack |
|------------------|----|-------------|---------------|------|
| 5 PIECES | | | | |
| PH1 | 50 | UUSE0313621 | 4013769360717 | A |
| PH2 | 50 | UUSE0313622 | 4013769340887 | A |
| PH3 | 50 | UUSE0313623 | 4013769360724 | A |
| 10 PIECES | | | | |
| PH1 | 50 | UUSG0313621 | 4013769434982 | A |
| PH2 | 50 | UUSG0313622 | 4013769434999 | A |
| PH3 | 50 | UUSG0313623 | 4013769435002 | A |



TORX®

| Taille | Lg | Ref. | Gencod | Pack |
|------------------|----|-------------|---------------|------|
| 5 PIECES | | | | |
| T10 | 50 | UUSE0303654 | 4013769360915 | A |
| T15 | 50 | UUSE0303655 | 4013769360922 | A |
| T20 | 50 | UUSE0303656 | 4013769360939 | A |
| T25 | 50 | UUSE0303657 | 4013769340900 | A |
| T30 | 50 | UUSE0303659 | 4013769360946 | A |
| T40 | 50 | UUSE0303660 | 4013769360953 | A |
| 10 PIECES | | | | |
| T10 | 50 | UUSG0303654 | 4013769435040 | A |
| T15 | 50 | UUSG0303655 | 4013769435057 | A |
| T20 | 50 | UUSG0303656 | 4013769435064 | A |
| T25 | 50 | UUSG0303657 | 4013769435071 | A |
| T30 | 50 | UUSG0303659 | 4013769435088 | A |
| T40 | 50 | UUSG0303660 | 4013769435095 | A |

ISOTIN®

TOP QUALITY

OPTIMUM
SOLUTION FOR
INDUSTRIAL
APPLICATIONS



Features

- Double titanium layer.
- Surface hardness of 3,000 Vickers (standard TIN bit approx. 2,500 Vickers).
- Optimised core toughness and a thicker wearing coat give a longer tool life than that of a TIN bit with standard coating.
- Torsion geometry.
- Quick lock attachment.
- Optimum corrosion protection

Benefits

- As a result of the torsional shape, the bit is suitable for all delicate applications in both hard and soft materials.
- ISOTIN® bits for screw fastening series.
- The double titanium cover prevents corrosion and ensures high surface hardness.
- Quick lock attachment for optimum holding in the chuck.
- The torsion geometry combined with the ISOTIN® coating increases the resistance to tightening torque.
- Fully compatible with PL, PH, PZ, TX type screw.



1/4" DIN 3126 C 6,3
1/4" DIN 3126 E 6,3

LENGTH: 25 mm

DIN 3126 C 6,3



POZIDRIV - DIN 5260

| Taille | Lg | Ref. | Gencod | Pack |
|------------------|----|-------------|---------------|------|
| 5 PIECES | | | | |
| PZ1 | 25 | UUSE0022360 | 4013769341075 | A |
| PZ2 | 25 | UUSE0022361 | 4013769340771 | A |
| PZ3 | 25 | UUSE0022362 | 4013769341082 | A |
| 10 PIECES | | | | |
| PZ1 | 25 | UUSG0022360 | 4013769288677 | A |
| PZ2 | 25 | UUSG0022361 | 4013769126702 | A |
| PZ3 | 25 | UUSG0022362 | 4013769127488 | A |
| 25 PIECES | | | | |
| PZ2 | 25 | UUSL0022361 | 4013769346247 | A |



PHILLIPS - DIN 5260

| Taille | Lg | Ref. | Gencod | Pack |
|------------------|----|-------------|---------------|------|
| 5 PIECES | | | | |
| PH1 | 25 | UUSE0022341 | 4013769341051 | A |
| PH2 | 25 | UUSE0022342 | 4013769277459 | A |
| PH3 | 25 | UUSE0022344 | 4013769341068 | A |
| 10 PIECES | | | | |
| PH1 | 25 | UUSG0022341 | 4013769288820 | A |
| PH2 | 25 | UUSG0022342 | 4013769126696 | A |
| PH3 | 25 | UUSG0022344 | 4013769435101 | A |
| 25 PIECES | | | | |
| PH2 | 25 | UUSL0022342 | 4013769346230 | A |

Taille

Lg

Ref.

Gencod

Pack

5 PIECES

| | | | | |
|-----|----|------------|---------------|---|
| T10 | 25 | UUE0022393 | 4013769341105 | A |
| T15 | 25 | UUE0022394 | 4013769341112 | A |
| T20 | 25 | UUE0022395 | 4013769341129 | A |
| T25 | 25 | UUE0022396 | 4013769340788 | A |
| T30 | 25 | UUE0022398 | 4013769341136 | A |
| T40 | 25 | UUE0022399 | 4013769341143 | A |

10 PIECES

| | | | | |
|-----|----|-------------|---------------|---|
| T10 | 25 | UUSG0022393 | 4013769300836 | A |
| T15 | 25 | UUSG0022394 | 4013769300843 | A |
| T20 | 25 | UUSG0022395 | 4013769300850 | A |
| T25 | 25 | UUSG0022396 | 4013769300867 | A |
| T30 | 25 | UUSG0022398 | 4013769300874 | A |
| T40 | 25 | UUSG0022399 | 4013769300881 | A |


25 PIECES

| | | | | |
|-----|----|-------------|---------------|---|
| T20 | 25 | UUSL0022395 | 4013769435163 | A |
| T25 | 25 | UUSL0022396 | 4013769435170 | A |
| T30 | 25 | UUSL0022398 | 4013769435187 | A |



SLOT - DIN 3127

| Taille | Lg | Ref. | Gencod | Pack |
|------------------|----|-------------|---------------|------|
| 5 PIECES | | | | |
| SL0,6x4,5 | 25 | UUSE0212303 | 4013769435118 | A |
| SL0,8x5,5 | 25 | UUSE0212305 | 4013769435125 | A |
| SL1x5,5 | 25 | UUSE0212306 | 4013769435132 | A |
| SL1,2x6,5 | 25 | UUSE0212307 | 4013769435149 | A |
| 10 PIECES | | | | |
| SL0,6x4,5 | 25 | UUSG0212303 | 4013769300935 | A |
| SL0,8x5,5 | 25 | UUSG0212305 | 4013769300942 | A |
| SL1x5,5 | 25 | UUSG0212306 | 4013769300959 | A |
| SL1,2x6,5 | 25 | UUSG0212307 | 4013769435156 | A |

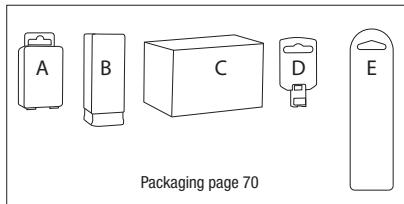

LENGTH: 50 mm

DIN 3126 E 6,3



POZIDRIV - DIN 5260

| Taille | Lg | Ref. | Gencod | Pack |
|------------------|----|-------------|---------------|------|
| 5 PIECES | | | | |
| PZ1 | 50 | UUSE0213630 | 4013769360793 | A |
| PZ2 | 50 | UUSE0213631 | 4013769340825 | A |
| PZ3 | 50 | UUSE0213632 | 4013769360809 | A |
| 10 PIECES | | | | |
| PZ1 | 50 | UUSG0213630 | 4013769368997 | A |
| PZ2 | 50 | UUSG0213631 | 4013769369000 | A |
| PZ3 | 50 | UUSG0213632 | 4013769373618 | A |



PHILLIPS - DIN 5260

| Taille | Lg | Ref. | Gencod | Pack |
|------------------|----|-------------|---------------|------|
| 5 PIECES | | | | |
| PH1 | 50 | UUSE0213621 | 4013769360731 | A |
| PH2 | 50 | UUSE0213622 | 4013769340818 | A |
| PH3 | 50 | UUSE0213623 | 4013769360748 | A |
| 10 PIECES | | | | |
| PH1 | 50 | UUSG0213621 | 4013769368973 | A |
| PH2 | 50 | UUSG0213622 | 4013769368980 | A |
| PH3 | 50 | UUSG0213623 | 4013769369079 | A |



TORX®

| Taille | Lg | Ref. | Gencod | Pack |
|------------------|----|-------------|---------------|------|
| 5 PIECES | | | | |
| T10 | 50 | UUSE0203654 | 4013769360960 | A |
| T15 | 50 | UUSE0203655 | 4013769360977 | A |
| T20 | 50 | UUSE0203656 | 4013769360984 | A |
| T25 | 50 | UUSE0203657 | 4013769340856 | A |
| T30 | 50 | UUSE0203659 | 4013769360991 | A |
| T40 | 50 | UUSE0203660 | 4013769361004 | A |
| 10 PIECES | | | | |
| T10 | 50 | UUSG0203654 | 4013769435194 | A |
| T15 | 50 | UUSG0203655 | 4013769435200 | A |
| T20 | 50 | UUSG0203656 | 4013769435217 | A |
| T25 | 50 | UUSG0203657 | 4013769435224 | A |
| T30 | 50 | UUSG0203659 | 4013769435231 | A |
| T40 | 50 | UUSG0203660 | 4013769435248 | A |

INDUSTRY PRO QUALITY

FOR
PROFESSIONALS
SOLUTION
FOR ALL
CURRENT
SCREW
FASTENING



Features

- Quick lock attachment.
- Torsion geometry.
- Standard DIN hardness.
- Sandblasted.
- Rust proof protection.



Benefits

- Bits for classic power drivers.
- Quick lock attachment, optimum hold in the chuck.
- Torsion geometry for higher strength against the tightening torque.
- Fully compatible with PZ, PH, TX, TT, HEX, TPLUS, SL, TS, Ro, XZN, TW type screw.
- Full range with, 25, 50, 70, 90, 110, 125, 150, 200, 250 lengths, reduced shank, double bits...



1/4" DIN 3126 C 6,3
1/4" DIN 3126 E 6,3



LENGTH: 25 mm

DIN 3126 C 6,3



POZIDRIV - DIN 5260

| Taille | Lg | Torsion | Ref. | Gencod | Pack |
|-----------------|----|---------|-------------|---------------|------|
| 5 PIECES | | | | | |
| PZ0 | 25 | | UUSE0012053 | 4013769435286 | A |
| PZ1 | 25 | x | UUSE0012360 | 4013769348135 | A |
| PZ2 | 25 | x | UUSE0012361 | 4013769340702 | A |
| PZ3 | 25 | x | UUSE0012362 | 4013769348142 | A |
| PZ4 | 32 | | UUSE0012063 | 4013769280473 | A |

10 PIECES

| PZ0 | 25 | | UUSG0012053 | 4013769435293 | A |
|-----|----|---|-------------|---------------|---|
| PZ1 | 25 | x | UUSG0012360 | 4013769294265 | A |
| PZ2 | 25 | x | UUSG0012361 | 4013769294296 | A |
| PZ3 | 25 | x | UUSG0012362 | 4013769294333 | A |
| PZ4 | 32 | | UUSG0012063 | 4013769281234 | A |

25 PIECES

| PZ1 | 25 | x | UUSL0012360 | 4013769349361 | A |
|-----|----|---|-------------|---------------|---|
| PZ2 | 25 | x | UUSL0012361 | 4013769348074 | A |
| PZ3 | 25 | x | UUSL0012362 | 4013769351913 | A |

500 PIECES

| PZ1 | 25 | x | U0012360/500 | 4013769435309 | C |
|-----|----|---|--------------|---------------|---|
| PZ2 | 25 | x | U0012361/500 | 4013769435316 | C |
| PZ3 | 25 | x | U0012362/500 | 4013769435323 | C |



PHILLIPS - DIN 5260

| Taille | Lg | Torsion | Ref. | Gencod | Pack |
|-----------------|----|---------|-------------|---------------|------|
| 5 PIECES | | | | | |
| PH0 | 25 | | UUSE0012040 | 4013769126115 | A |
| PH1 | 25 | x | UUSE0012341 | 4013769348128 | A |
| PH2 | 25 | x | UUSE0012342 | 4013769340696 | A |
| PH3 | 25 | x | UUSE0012343 | 4013769277442 | A |
| PH4 | 32 | | UUSE0012045 | 4013769134493 | A |

10 PIECES

| PH0 | 25 | | UUSG0012040 | 4013769281029 | A |
|-----|----|---|-------------|---------------|---|
| PH1 | 25 | x | UUSG0012341 | 4013769294098 | A |
| PH2 | 25 | x | UUSG0012342 | 4013769294135 | A |
| PH3 | 25 | x | UUSG0012343 | 4013769294159 | A |
| PH4 | 32 | | UUSG0012045 | 4013769281036 | A |

25 PIECES

| PH1 | 25 | x | UUSL0012341 | 4013769351890 | A |
|-----|----|---|-------------|---------------|---|
| PH2 | 25 | x | UUSL0012342 | 4013769348067 | A |
| PH3 | 25 | x | UUSL0012343 | 4013769351906 | A |

500 PIECES

| PH1 | 25 | x | U0012341/500 | 4013769435255 | C |
|-----|----|---|--------------|---------------|---|
| PH2 | 25 | x | U0012342/500 | 4013769435262 | C |
| PH3 | 25 | x | U0012343/500 | 4013769435279 | C |



TORX®

| Taille | Lg | Torsion | Ref. | Gencod | Pack |
|-----------------|----|---------|-------------|---------------|------|
| 5 PIECES | | | | | |
| T5 | 25 | | UUSE0012088 | 4013769128652 | A |
| T6 | 25 | | UUSE0012089 | 4013769435330 | A |
| T7 | 25 | | UUSE0012090 | 4013769304568 | A |
| T8 | 25 | | UUSE0012091 | 4013769127976 | A |
| T9 | 25 | | UUSE0012092 | 4013769329745 | A |
| T10 | 25 | x | UUSE0012393 | 4013769352811 | A |
| T15 | 25 | x | UUSE0012394 | 4013769348159 | A |
| T20 | 25 | x | UUSE0012395 | 4013769344830 | A |
| T25 | 25 | x | UUSE0012396 | 4013769340719 | A |
| T27 | 25 | x | UUSE0012397 | 4013769348166 | A |
| T30 | 25 | x | UUSE0012398 | 4013769344847 | A |
| T40 | 25 | x | UUSE0012399 | 4013769348173 | A |

10 PIECES

| Taille | Lg | Torsion | Ref. | Gencod | Pack |
|-----------------|----|---------|-------------|---------------|------|
| 5 PIECES | | | | | |
| T5 | 25 | | UUSG0012088 | 4013769128584 | A |
| T6 | 25 | | UUSG0012089 | 4013769127754 | A |
| T7 | 25 | | UUSG0012090 | 4013769128591 | A |
| T8 | 25 | | UUSG0012091 | 4013769127761 | A |
| T9 | 25 | | UUSG0012092 | 4013769275004 | A |
| T10 | 25 | x | UUSG0012393 | 4013769298942 | A |
| T15 | 25 | x | UUSG0012394 | 4013769298959 | A |
| T20 | 25 | x | UUSG0012395 | 4013769298966 | A |
| T25 | 25 | x | UUSG0012396 | 4013769298973 | A |
| T27 | 25 | x | UUSG0012397 | 4013769344809 | A |
| T30 | 25 | x | UUSG0012398 | 4013769298980 | A |
| T40 | 25 | x | UUSG0012399 | 4013769298997 | A |

25 PIECES

| Taille | Lg | Torsion | Ref. | Gencod | Pack |
|-----------------|----|---------|-------------|---------------|------|
| 5 PIECES | | | | | |
| T10 | 25 | x | UUSL0012393 | 4013769363466 | A |
| T15 | 25 | x | UUSL0012394 | 4013769363473 | A |
| T20 | 25 | x | UUSL0012395 | 4013769363480 | A |
| T25 | 25 | x | UUSL0012396 | 4013769363459 | A |
| T30 | 25 | x | UUSL0012398 | 4013769377562 | A |
| T40 | 25 | x | UUSL0012399 | 4013769377579 | A |

500 PIECES

| Taille | Lg | Torsion | Ref. | Gencod | Pack |
|-------------------|----|---------|--------------|---------------|------|
| 500 PIECES | | | | | |
| T10 | 25 | x | U0012393/500 | 4013769435347 | C |
| T15 | 25 | x | U0012394/500 | 4013769435354 | C |
| T20 | 25 | x | U0012395/500 | 4013769435361 | C |
| T25 | 25 | x | U0012396/500 | 4013769435378 | C |
| T30 | 25 | x | U0012398/500 | 4013769435385 | C |
| T40 | 25 | x | U0012399/500 | 4013769435392 | C |



TORX® BALL END

| Taille | Lg | Ref. | Gencod | Pack |
|------------------|----|-------------|---------------|------|
| 5 PIECES | | | | |
| T10 K | 25 | UUSE0012993 | 4013769435613 | A |
| T15 K | 25 | UUSE0012994 | 4013769435637 | A |
| T20 K | 25 | UUSE0012995 | 4013769435651 | A |
| T25 K | 25 | UUSE0012996 | 4013769435675 | A |
| T30 K | 25 | UUSE0012998 | 4013769435699 | A |
| T40 K | 25 | UUSE0012999 | 4013769435712 | A |
| 10 PIECES | | | | |
| T10 K | 25 | UUSG0012993 | 4013769435620 | A |
| T15 K | 25 | UUSG0012994 | 4013769435644 | A |
| T20 K | 25 | UUSG0012995 | 4013769435668 | A |
| T25 K | 25 | UUSG0012996 | 4013769435682 | A |
| T30 K | 25 | UUSG0012998 | 4013769435705 | A |
| T40 K | 25 | UUSG0012999 | 4013769435729 | A |



TORX® TAMPER

| Taille | Lg | Ref. | Gencod | Pack |
|-----------------|----|-------------|---------------|------|
| 5 PIECES | | | | |
| TT10 | 25 | UUSE0012293 | 4013769125491 | A |
| TT15 | 25 | UUSE0012294 | 4013769127211 | A |
| TT20 | 25 | UUSE0012295 | 4013769125507 | A |
| TT25 | 25 | UUSE0012296 | 4013769127495 | A |
| TT30 | 25 | UUSE0012298 | 4013769124869 | A |
| TT40 | 25 | UUSE0012299 | 4013769124876 | A |

10 PIECES

| Taille | Lg | Ref. | Gencod | Pack |
|-----------------|----|-------------|---------------|------|
| 5 PIECES | | | | |
| TT10 | 25 | UUSG0012293 | 4013769127778 | A |
| TT15 | 25 | UUSG0012294 | 4013769127785 | A |
| TT20 | 25 | UUSG0012295 | 4013769127792 | A |
| TT25 | 25 | UUSG0012296 | 4013769127808 | A |
| TT30 | 25 | UUSG0012298 | 4013769127822 | A |
| TT40 | 25 | UUSG0012299 | 4013769124598 | A |



HEX BALL END - DIN 7426

| Taille | Lg | Ref. | Gencod | Pack |
|-----------------|----|-------------|---------------|------|
| 5 PIECES | | | | |
| SW2,5 K | 25 | UUSE0012970 | 4013769435521 | A |
| SW3 K | 25 | UUSE0012971 | 4013769435538 | A |
| SW4 K | 25 | UUSE0012972 | 4013769435545 | A |
| SW5 K | 25 | UUSE0012973 | 4013769435552 | A |
| SW6 K | 25 | UUSE0012974 | 4013769435569 | A |




HEX - DIN 7426

| Taille | Lg | Ref. | Gencod | Pack |
|-----------------|----|-------------|---------------|------|
| 5 PIECES | | | | |
| HEX 2 | 25 | UUSE0012069 | 4013769128645 | A |
| HEX 2,5 | 25 | UUSE0012070 | 4013769126122 | A |
| HEX 3 | 25 | UUSE0012071 | 4013769126733 | A |
| HEX 4 | 25 | UUSE0012072 | 4013769191090 | A |
| HEX 5 | 25 | UUSE0012073 | 4013769191106 | A |
| HEX 6 | 25 | UUSE0012074 | 4013769191113 | A |
| HEX 7 | 25 | UUSE0012075 | 4013769275066 | A |
| HEX 8 | 25 | UUSE0012076 | 4013769286604 | A |
| HEX 10 | 25 | UUSE0012077 | 4013769355621 | A |



TORX PLUS®

| Taille | Lg | Ref. | Gencod | Pack |
|------------------|----|-------------|---------------|------|
| 5 PIECES | | | | |
| T10+ | 25 | UUSE0012793 | 4013769435736 | A |
| T15+ | 25 | UUSE0012794 | 4013769435750 | A |
| T20+ | 25 | UUSE0012795 | 4013769435774 | A |
| T25+ | 25 | UUSE0012796 | 4013769435798 | A |
| T30+ | 25 | UUSE0012798 | 4013769435811 | A |
| T40+ | 25 | UUSE0012799 | 4013769435835 | A |
| 10 PIECES | | | | |
| T10+ | 25 | UUSG0012793 | 4013769435743 | A |
| T15+ | 25 | UUSG0012794 | 4013769435767 | A |
| T20+ | 25 | UUSG0012795 | 4013769435781 | A |
| T25+ | 25 | UUSG0012796 | 4013769435804 | A |
| T30+ | 25 | UUSG0012798 | 4013769435828 | A |
| T40+ | 25 | UUSG0012799 | 4013769435842 | A |

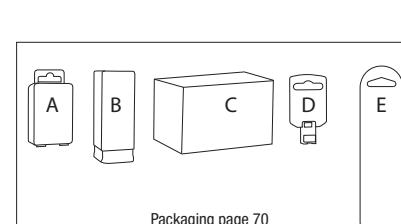

Packaging page 70

INDUSTRY PRO QUALITY SUITE

LENGTH: 25 mm

DIN 3126 C 6,3



SLOT - DIN 3127

| Taille | Lg | Torsion | Ref. | Gencod | Pack |
|--------|----|---------|------|--------|------|
|--------|----|---------|------|--------|------|

5 PIECES

| | | | | |
|------------------|----|-------------|---------------|---------------|
| SL0,5x3 | 25 | UUSE0112000 | 4013769435408 | A |
| SL0,5x4 | 25 | UUSE0112001 | 4013769435415 | A |
| SL0,6x3,5 | 25 | UUSE0112002 | 4013769435422 | A |
| SL0,6x4,5 | 25 | x | UUSE0112303 | 4013769348180 |
| SL0,8x4,5 | 25 | | UUSE0112004 | 4013769284501 |
| SL0,8x5,5 | 25 | x | UUSE0112305 | 4013769340726 |
| SL1,2x6,5 | 25 | x | UUSE0112307 | 4013769348197 |
| SL1,2x8 | 25 | | UUSE0112008 | 4013769435491 |
| SL1,6x8 | 25 | | UUSE0112009 | 4013769128669 |
| SL1x5,5 | 25 | x | UUSE0112306 | 4013769352828 |

10 PIECES

| | | | | |
|------------------|----|-------------|---------------|---------------|
| SL0,5x3 | 25 | UUSG0112000 | 4013769280954 | A |
| SL0,5x4 | 25 | UUSG0112001 | 4013769280961 | A |
| SL0,6x3,5 | 25 | UUSG0112002 | 4013769283627 | A |
| SL0,6x4,5 | 25 | x | UUSG0112303 | 4013769299000 |
| SL0,8x4,5 | 25 | | UUSG0112004 | 4013769274748 |
| SL0,8x5,5 | 25 | x | UUSG0112305 | 4013769299017 |
| SL1,2x6,5 | 25 | x | UUSG0112307 | 4013769299031 |
| SL1,2x8 | 25 | | UUSG0112008 | 4013769435507 |
| SL1,6x8 | 25 | | UUSG0112009 | 4013769280978 |
| SL1x5,5 | 25 | x | UUSG0112306 | 4013769299024 |

25 PIECES

| | | | | | |
|------------------|----|---|-------------|---------------|---|
| SL0,8x5,5 | 25 | x | UUSL0112305 | 4013769435446 | A |
| SL1,2x6,5 | 25 | x | UUSL0112307 | 4013769435477 | A |
| SL1x5,5 | 25 | x | UUSL0112306 | 4013769435460 | A |

500 PIECES

| | | | | | |
|------------------|----|---|--------------|---------------|---|
| SL0,6x4,5 | 25 | x | U0112303/500 | 4013769435439 | C |
| SL0,8x5,5 | 25 | x | U0112305/500 | 4013769435453 | C |
| SL1,2x6,5 | 25 | x | U0112307/500 | 4013769435484 | C |



XZN

| Taille | Lg | Ref. | Gencod | Pack |
|--------|----|------|--------|------|
|--------|----|------|--------|------|

5 PIECES

| | | | | |
|--------------|----|-------------|---------------|---|
| XZN4 | 25 | UUSE0012780 | 4013769436269 | A |
| XZN5 | 25 | UUSE0012781 | 4013769436276 | A |
| XZN6 | 25 | UUSE0012782 | 4013769436283 | A |
| XZN8 | 25 | UUSE0012783 | 4013769436290 | A |
| XZN10 | 25 | UUSE0012784 | 4013769436306 | A |



POZIDRIV Z ACR - DIN 5260




PHILLIPS ACR - DIN 5260

| Taille | Lg | Ref. | Gencod | Pack |
|-----------------|----|-------------|---------------|------|
| 5 PIECES | | | | |
| PZ1 ACR | 25 | UUSE0012860 | 4013769436047 | A |
| PZ2 ACR | 25 | UUSE0012861 | 4013769436054 | A |
| PZ3 ACR | 25 | UUSE0012862 | 4013769436061 | A |

| Taille | Lg | Ref. | Gencod | Pack |
|-----------------|----|-------------|---------------|------|
| 5 PIECES | | | | |
| PH1 ACR | 25 | UUSE0012841 | 4013769435989 | A |
| PH2 ACR | 25 | UUSE0012842 | 4013769436009 | A |
| PH3 ACR | 25 | UUSE0012843 | 4013769436023 | A |

| Taille | Lg | Ref. | Gencod | Pack |
|------------------|----|-------------|---------------|------|
| 10 PIECES | | | | |
| PH1 ACR | 25 | UUSG0012841 | 4013769435996 | A |
| PH2 ACR | 25 | UUSG0012842 | 4013769436016 | A |
| PH3 ACR | 25 | UUSG0012843 | 4013769436030 | A |

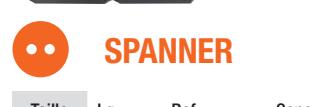

SPANNER

| Taille | Lg | Ref. | Gencod | Pack |
|-----------------|----|-------------|---------------|------|
| 5 PIECES | | | | |
| SP4 | 25 | UUSE0012730 | 4013769439444 | A |
| SP6 | 25 | UUSE0012731 | 4013769439451 | A |
| SP8 | 25 | UUSE0012732 | 4013769439468 | A |
| SP10 | 25 | UUSE0012733 | 4013769439475 | A |



ROBERTSON - DIN 7426

| Taille | Lg | Ref. | Gencod | Pack |
|-----------------|----|-------------|---------------|------|
| 5 PIECES | | | | |
| R0 | 25 | UUSE0012026 | 4013769435576 | A |
| R1 | 25 | UUSE0012027 | 4013769435583 | A |
| R2 | 25 | UUSE0012028 | 4013769435590 | A |
| R3 | 25 | UUSE0012029 | 4013769435606 | A |

| Taille | Lg | Ref. | Gencod | Pack |
|-----------------|----|-------------|---------------|------|
| 5 PIECES | | | | |
| TW0 | 25 | UUSE0012770 | 4013769436177 | A |
| TW1 | 25 | UUSE0012771 | 4013769436184 | A |
| TW2 | 25 | UUSE0012772 | 4013769436191 | A |
| TW3 | 25 | UUSE0012773 | 4013769436207 | A |
| TW4 | 25 | UUSE0012774 | 4013769436214 | A |
| TW5 | 25 | UUSE0012775 | 4013769436221 | A |
| TW6 | 32 | UUSE0012776 | 4013769436238 | A |
| TW7 | 32 | UUSE0012777 | 4013769436245 | A |
| TW8 | 32 | UUSE0012778 | 4013769436252 | A |



LENGTH: 50 mm

DIN 3126 E 6,3



POZIDRIV - DIN 5260

| Taille | Lg | Torsion | Ref. | Gencod | Pack |
|-------------------|----|---------|--------------|---------------|------|
| 5 PIECES | | | | | |
| PZ1 | 50 | x | UUSE0013630 | 4013769360816 | A |
| PZ2 | 50 | x | UUSE0013631 | 4013769340757 | A |
| PZ3 | 50 | x | UUSE0013632 | 4013769360823 | A |
| 10 PIECES | | | | | |
| PZ1 | 50 | x | UUSG0013630 | 4013769360878 | A |
| PZ2 | 50 | x | UUSG0013631 | 4013769360892 | A |
| PZ3 | 50 | x | UUSG0013632 | 4013769360908 | A |
| 250 PIECES | | | | | |
| PZ1 | 50 | x | U0013630/250 | 4013769436641 | C |
| PZ2 | 50 | x | U0013631/250 | 4013769436658 | C |
| PZ3 | 50 | x | U0013632/250 | 4013769436665 | C |



TORX®

| Taille | Lg | Torsion | Ref. | Gencod | Pack |
|-------------------|----|---------|--------------|---------------|------|
| 5 PIECES | | | | | |
| T10 | 50 | x | UUSE0103654 | 4013769361011 | A |
| T15 | 50 | x | UUSE0103655 | 4013769361028 | A |
| T20 | 50 | x | UUSE0103656 | 4013769361035 | A |
| T25 | 50 | x | UUSE0103657 | 4013769340764 | A |
| T27 | 50 | x | UUSE0103658 | 4013769436740 | A |
| T30 | 50 | x | UUSE0103659 | 4013769361042 | A |
| T40 | 50 | x | UUSE0103660 | 4013769361059 | A |
| 10 PIECES | | | | | |
| T10 | 50 | x | UUSG0103654 | 4013769377661 | A |
| T15 | 50 | x | UUSG0103655 | 4013769377678 | A |
| T20 | 50 | x | UUSG0103656 | 4013769377685 | A |
| T25 | 50 | x | UUSG0103657 | 4013769377692 | A |
| T27 | 50 | x | UUSG0103658 | 4013769436757 | A |
| T30 | 50 | x | UUSG0103659 | 4013769377210 | A |
| T40 | 50 | x | UUSG0103660 | 4013769377708 | A |
| 250 PIECES | | | | | |
| T10 | 50 | x | U0103654/250 | 4013769436702 | C |
| T15 | 50 | x | U0103655/250 | 4013769436719 | C |
| T20 | 50 | x | U0103656/250 | 4013769436726 | C |
| T25 | 50 | x | U0103657/250 | 4013769436733 | C |
| T27 | 50 | x | U0103658/250 | 4013769436764 | C |
| T30 | 50 | x | U0103659/250 | 4013769436771 | C |
| T40 | 50 | x | U0103660/250 | 4013769436788 | C |



PHILLIPS - DIN 5260

| Taille | Lg | Torsion | Ref. | Gencod | Pack |
|-----------------|----|---------|-------------|---------------|------|
| 5 PIECES | | | | | |
| PH1 | 50 | x | UUSE0013621 | 4013769360755 | A |
| PH2 | 50 | x | UUSE0013622 | 4013769340740 | A |
| PH3 | 50 | x | UUSE0013623 | 4013769360762 | A |

| Taille | Lg | Torsion | Ref. | Gencod | Pack |
|-------------------|----|---------|--------------|---------------|------|
| 10 PIECES | | | | | |
| PH1 | 50 | x | UUSG0013621 | 4013769360847 | A |
| PH2 | 50 | x | UUSG0013622 | 4013769360854 | A |
| PH3 | 50 | x | UUSG0013623 | 4013769360861 | A |
| 250 PIECES | | | | | |
| PH0 | 50 | x | U0013621/250 | 4013769436672 | C |
| PH1 | 50 | x | U0013622/250 | 4013769436689 | C |
| PH2 | 50 | x | U0013623/250 | 4013769436696 | C |




SLOT

| Taille | Lg | Torsion | Ref. | Gencod | Pack |
|------------------|----|---------|-------------|---------------|------|
| 5 PIECES | | | | | |
| SL0,6x4,5 | 50 | x | UUSE0113603 | 4013769436795 | A |
| SL0,8x5,5 | 50 | x | UUSE0113605 | 4013769374110 | A |
| SL1x5,5 | 50 | x | UUSE0113606 | 4013769436801 | A |
| SL1,2x6,5 | 50 | x | UUSE0113607 | 4013769436818 | A |



HEX BALL END - DIN 7426

| Taille | Lg | Ref. | Gencod | Pack |
|------------------|----|-------------|---------------|------|
| 5 PIECES | | | | |
| HEX 2 K | 50 | UUSE0013941 | 4013769436825 | A |
| HEX 2,5 K | 50 | UUSE0013942 | 4013769436832 | A |
| HEX 3 K | 50 | UUSE0013943 | 4013769436849 | A |
| HEX 4 K | 50 | UUSE0013944 | 4013769436856 | A |
| HEX 5 K | 50 | UUSE0013945 | 4013769436863 | A |
| HEX 6 K | 50 | UUSE0013946 | 4013769436870 | A |

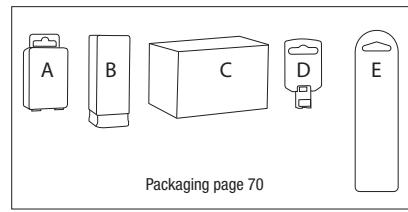

Packaging page 70

INDUSTRY

PRO QUALITY SUITE

LENGTH: 50 mm

DIN 3126 C 6,3



POZIDRIV - DIN 5260

| Taille | Lg | Ref. | Gencod | Pack |
|-------------------|----|--------------|---------------|------|
| 5 PIECES | | | | |
| PZ1 | 50 | UUSE0012064 | 4013769310743 | A |
| PZ2 | 50 | UUSE0012065 | 4013769310750 | A |
| PZ3 | 50 | UUSE0012066 | 4013769310767 | A |
| 250 PIECES | | | | |
| PZ1 | 50 | U0012064/250 | 4013769436924 | C |
| PZ2 | 50 | U0012065/250 | 4013769436931 | C |
| PZ3 | 50 | U0012066/250 | 4013769436948 | C |



PHILLIPS - DIN 5260

| Taille | Lg | Ref. | Gencod | Pack |
|-------------------|----|--------------|---------------|------|
| 5 PIECES | | | | |
| PH1 | 50 | UUSE0012046 | 4013769436887 | A |
| PH2 | 50 | UUSE0012047 | 4013769310729 | A |
| PH3 | 50 | UUSE0012050 | 4013769310736 | A |
| 250 PIECES | | | | |
| PH1 | 50 | U0012046/250 | 4013769436894 | C |
| PH2 | 50 | U0012047/250 | 4013769436900 | C |
| PH3 | 50 | U0012050/250 | 4013769436917 | C |

REDUCED SHANK

LENGTH: 50 mm

DIN 3126 E 6,3



POZIDRIV - DIN 5260

| Taille | Lg | Ref. | Gencod | Pack |
|-------------------|----|--------------|---------------|------|
| 5 PIECES | | | | |
| PZ1 | 50 | UUSE0013030 | 4013769190727 | A |
| PZ2 | 50 | UUSE0013031 | 4013769190710 | A |
| PZ3 | 50 | UUSE0013032 | 4013769438652 | A |
| 10 PIECES | | | | |
| PZ1 | 50 | UUSG0013030 | 4013769438669 | A |
| PZ2 | 50 | UUSG0013031 | 4013769190666 | A |
| PZ3 | 50 | UUSG0013032 | 4013769438676 | A |
| 250 PIECES | | | | |
| PZ1 | 50 | U0013030/250 | 4013769438683 | C |
| PZ2 | 50 | U0013031/250 | 4013769438690 | C |
| PZ3 | 50 | U0013032/250 | 4013769438706 | C |



PHILLIPS - DIN 5260

| Taille | Lg | Ref. | Gencod | Pack |
|-------------------|----|--------------|---------------|------|
| 5 PIECES | | | | |
| PH0 | 50 | UUSE0013020 | 4013769438713 | A |
| PH1 | 50 | UUSE0013021 | 4013769438720 | A |
| PH2 | 50 | UUSE0013022 | 4013769190741 | A |
| PH3 | 50 | UUSE0013023 | 4013769438737 | A |
| 10 PIECES | | | | |
| PH0 | 50 | UUSG0013020 | 4013769438744 | A |
| PH1 | 50 | UUSG0013021 | 4013769190628 | A |
| PH2 | 50 | UUSG0013022 | 4013769190635 | A |
| PH3 | 50 | UUSG0013023 | 4013769438751 | A |
| 250 PIECES | | | | |
| PH0 | 50 | U0013020/250 | 4013769438768 | C |
| PH1 | 50 | U0013021/250 | 4013769438775 | C |
| PH2 | 50 | U0013022/250 | 4013769438782 | C |
| PH3 | 50 | U0013023/250 | 4013769438799 | C |

LENGTH: 50 mm

DIN 3126 E 6,3




TORX®

| Taille | Lg | Ref. | Gencod | Pack |
|-------------------|----|--------------|----------------|------|
| 5 PIÈCES | | | | |
| T6 | 50 | UUSE0103050 | 4013769438867 | A |
| T7 | 50 | UUSE0103051 | 4013769438874 | A |
| T8 | 50 | UUSE0103052 | 40137694338433 | A |
| T9 | 50 | UUSE0103053 | 4013769438881 | A |
| T10 | 50 | UUSE0103054 | 4013769438805 | A |
| T15 | 50 | UUSE0103055 | 4013769438812 | A |
| T20 | 50 | UUSE0103056 | 4013769438829 | A |
| T25 | 50 | UUSE0103057 | 40137694338266 | A |
| T27 | 50 | UUSE0103058 | 4013769438836 | A |
| T30 | 50 | UUSE0103059 | 4013769438843 | A |
| T40 | 50 | UUSE0103060 | 4013769438850 | A |
| 10 PIÈCES | | | | |
| T10 | 50 | UUSG0103054 | 4013769438898 | A |
| T15 | 50 | UUSG0103055 | 4013769438904 | A |
| T20 | 50 | UUSG0103056 | 4013769438911 | A |
| T25 | 50 | UUSG0103057 | 4013769438928 | A |
| T27 | 50 | UUSG0103058 | 4013769438935 | A |
| T30 | 50 | UUSG0103059 | 4013769438942 | A |
| T40 | 50 | UUSG0103060 | 4013769438959 | A |
| 250 PIÈCES | | | | |
| T10 | 50 | U0103054/250 | 4013769438966 | C |
| T15 | 50 | U0103055/250 | 4013769438973 | C |
| T20 | 50 | U0103056/250 | 4013769438980 | C |
| T25 | 50 | U0103057/250 | 4013769438997 | C |
| T30 | 50 | U0103059/250 | 4013769440006 | C |
| T40 | 50 | U0103060/250 | 4013769440013 | C |



TORX® BALL END

| Taille | Lg | Ref. | Gencod | Pack |
|------------------|----|-------------|---------------|------|
| 5 PIÈCES | | | | |
| T10 K | 50 | UUSE0103954 | 4013769440020 | A |
| T15 K | 50 | UUSE0103955 | 4013769439031 | A |
| T20 K | 50 | UUSE0103956 | 4013769439048 | A |
| T25 K | 50 | UUSE0103957 | 4013769439055 | A |
| T30 K | 50 | UUSE0103959 | 4013769439062 | A |
| T40 K | 50 | UUSE0103960 | 4013769439079 | A |
| 10 PIÈCES | | | | |
| T10 K | 50 | UUSG0103954 | 4013769439086 | A |
| T15 K | 50 | UUSG0103955 | 4013769439093 | A |
| T20 K | 50 | UUSG0103956 | 4013769439109 | A |
| T25 K | 50 | UUSG0103957 | 4013769439116 | A |
| T30 K | 50 | UUSG0103959 | 4013769439123 | A |
| T40 K | 50 | UUSG0103960 | 4013769439130 | A |

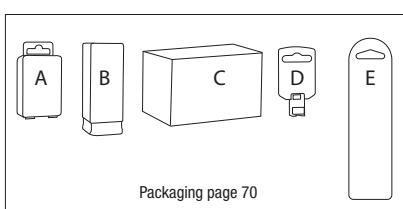

Packaging page 70



TORX® TAMPER

| Taille | Lg | Ref. | Gencod | Pack |
|------------------|----|-------------|---------------|------|
| 5 PIÈCES | | | | |
| T10 T | 50 | UUSE0103254 | 4013769439147 | A |
| T15 T | 50 | UUSE0103255 | 4013769439154 | A |
| T20 T | 50 | UUSE0103256 | 4013769439161 | A |
| T25 T | 50 | UUSE0103257 | 4013769439178 | A |
| T27 T | 50 | UUSE0103258 | 4013769439185 | A |
| T30 T | 50 | UUSE0103259 | 4013769439192 | A |
| T40 T | 50 | UUSE0103260 | 4013769439208 | A |
| 10 PIÈCES | | | | |
| T10 T | 50 | UUSG0103254 | 4013769348470 | A |
| T15 T | 50 | UUSG0103255 | 4013769348487 | A |
| T20 T | 50 | UUSG0103256 | 4013769439215 | A |
| T25 T | 50 | UUSG0103257 | 4013769439222 | A |
| T27 T | 50 | UUSG0103258 | 4013769439239 | A |
| T30 T | 50 | UUSG0103259 | 4013769439246 | A |
| T40 T | 50 | UUSG0103260 | 4013769439253 | A |



SLOT - DIN 3127

| Taille | Lg | Ref. | Gencod | Pack |
|------------------|----|-------------|---------------|------|
| 5 PIÈCES | | | | |
| SL0,5x3 | 50 | UUSE0113002 | 4013769439260 | A |
| SL0,5x4 | 50 | UUSE0113003 | 4013769439277 | A |
| SL0,6x3,5 | 50 | UUSE0113004 | 4013769439284 | A |
| SL0,6x4,5 | 50 | UUSE0113005 | 4013769439291 | A |
| SL0,8x4 | 50 | UUSE0113006 | 4013769439307 | A |
| SL0,8x5,5 | 50 | UUSE0113007 | 4013769439314 | A |
| SL1x5,5 | 50 | UUSE0113008 | 4013769439321 | A |
| SL1,2x6,5 | 50 | UUSE0113009 | 4013769439338 | A |



HEX - DIN 7426

| Taille | Lg | Ref. | Gencod | Pack |
|------------------|----|-------------|---------------|------|
| 5 PIÈCES | | | | |
| HEX 2 | 50 | UUSE0013041 | 4013769439345 | A |
| HEX 2,5 | 50 | UUSE0013042 | 4013769439352 | A |
| HEX 3 | 50 | UUSE0013043 | 4013769439369 | A |
| HEX 4 | 50 | UUSE0013044 | 4013769439376 | A |
| HEX 5 | 50 | UUSE0013045 | 4013769439383 | A |
| HEX 6 | 50 | UUSE0013046 | 4013769439390 | A |
| HEX 8 | 50 | UUSE0013048 | 4013769439406 | A |
| 10 PIÈCES | | | | |
| HEX 2 | 50 | UUSG0013041 | 4013769439413 | A |
| HEX 2,5 | 50 | UUSG0013042 | 4013769439420 | A |
| HEX 3 | 50 | UUSG0013043 | 4013769279828 | A |
| HEX 4 | 50 | UUSG0013044 | 4013769128676 | A |
| HEX 5 | 50 | UUSG0013045 | 4013769128683 | A |
| HEX 6 | 50 | UUSG0013046 | 4013769128690 | A |
| HEX 8 | 50 | UUSG0013048 | 4013769439437 | A |

INDUSTRY PRO QUALITY SUITE

LENGTH: 70 mm

DIN 3126 E 6,3



 **POZIDRIV - DIN 5260**

| Taille | Lg | Ref. | Gencod | Pack |
|------------------|----|-------------|---------------|------|
| 1 PIECE | | | | |
| PZ1 | 70 | UUSZ0135030 | 4013769438225 | D |
| PZ2 | 70 | UUSZ0135031 | 4013769438232 | D |
| PZ3 | 70 | UUSZ0135032 | 4013769438249 | D |
| 50 PIECES | | | | |
| PZ1 | 70 | U0135030/50 | 4013769438256 | B |
| PZ2 | 70 | U0135031/50 | 4013769438263 | B |
| PZ3 | 70 | U0135032/50 | 4013769440976 | B |



 **PHILLIPS - DIN 5260**

| Taille | Lg | Ref. | Gencod | Pack |
|------------------|----|-------------|---------------|------|
| 1 PIECE | | | | |
| PH1 | 70 | UUSZ0135021 | 4013769438287 | D |
| PH2 | 70 | UUSZ0135022 | 4013769438294 | D |
| PH3 | 70 | UUSZ0135023 | 4013769438300 | D |
| 50 PIECES | | | | |
| PH1 | 70 | U0135021/50 | 4013769438317 | B |
| PH2 | 70 | U0135022/50 | 4013769438324 | B |
| PH3 | 70 | U0135023/50 | 4013769438331 | B |



 **TORX®**

| Taille | Lg | Ref. | Gencod | Pack |
|----------------|----|-------------|---------------|------|
| 1 PIECE | | | | |
| T10 | 70 | UUSZ0135093 | 4013769438348 | D |
| T15 | 70 | UUSZ0135094 | 4013769438355 | D |
| T20 | 70 | UUSZ0135095 | 4013769438362 | D |
| T25 | 70 | UUSZ0135096 | 4013769438379 | D |
| T27 | 70 | UUSZ0135097 | 4013769438386 | D |
| T30 | 70 | UUSZ0135098 | 4013769438393 | D |
| T40 | 70 | UUSZ0135099 | 4013769438409 | D |

LENGTH: 90 mm

DIN 3126 E 6,3



 **POZIDRIV - DIN 5260**

| Taille | Lg | Ref. | Gencod | Pack |
|------------------|----|-------------|---------------|------|
| 1 PIECE | | | | |
| PZ1 | 90 | UUSZ0136030 | 4013769438034 | D |
| PZ2 | 90 | UUSZ0136031 | 4013769438041 | D |
| PZ3 | 90 | UUSZ0136032 | 4013769438058 | D |
| 50 PIECES | | | | |
| PZ1 | 90 | U0136030/50 | 4013769438065 | B |
| PZ2 | 90 | U0136031/50 | 4013769438072 | B |
| PZ3 | 90 | U0136032/50 | 4013769438089 | B |



 **PHILLIPS - DIN 5260**

| Taille | Lg | Ref. | Gencod | Pack |
|------------------|----|-------------|---------------|------|
| 1 PIECE | | | | |
| PH1 | 90 | UUSZ0136021 | 4013769438096 | D |
| PH2 | 90 | UUSZ0136022 | 4013769438102 | D |
| PH3 | 90 | UUSZ0136023 | 4013769438119 | D |
| 50 PIECES | | | | |
| PH1 | 90 | U0136021/50 | 4013769438126 | B |
| PH2 | 90 | U0136022/50 | 4013769438133 | B |
| PH3 | 90 | U0136023/50 | 4013769438140 | B |



 **TORX®**

| Taille | Lg | Ref. | Gencod | Pack |
|----------------|----|-------------|---------------|------|
| 1 PIECE | | | | |
| T20 | 90 | UUSZ0136095 | 4013769438171 | D |
| T25 | 90 | UUSZ0136096 | 4013769438188 | D |
| T27 | 90 | UUSZ0136097 | 4013769438195 | D |
| T30 | 90 | UUSZ0136098 | 4013769438201 | D |
| T40 | 90 | UUSZ0136099 | 4013769438218 | D |

LENGTH: 110 mm

DIN 3126 E 6,3



POZIDRIV - DIN 5260

| Taille | Lg | Ref. | Gencod | Pack |
|------------------|-----|-------------|---------------|------|
| 1 PIECE | | | | |
| PZ1 | 110 | UUSZ0137030 | 4013769440747 | D |
| PZ2 | 110 | UUSZ0137031 | 4013769440754 | D |
| PZ3 | 110 | UUSZ0137032 | 4013769440761 | D |
| 50 PIECES | | | | |
| PZ1 | 110 | U0137030/50 | 4013769440778 | B |
| PZ2 | 110 | U0137031/50 | 4013769440785 | B |
| PZ3 | 110 | U0137032/50 | 4013769440792 | B |



PHILLIPS - DIN 5260

| Taille | Lg | Ref. | Gencod | Pack |
|------------------|-----|-------------|---------------|------|
| 1 PIECE | | | | |
| PH1 | 110 | UUSZ0137021 | 4013769440808 | D |
| PH2 | 110 | UUSZ0137022 | 4013769440815 | D |
| PH3 | 110 | UUSZ0137023 | 4013769440822 | D |
| 50 PIECES | | | | |
| PH1 | 110 | U0137021/50 | 4013769438003 | B |
| PH2 | 110 | U0137022/50 | 4013769438010 | B |
| PH3 | 110 | U0137023/50 | 4013769438027 | B |

LENGTH: 125 mm

DIN 3126 E 6,3



POZIDRIV - DIN 5260

| Taille | Lg | Ref. | Gencod | Pack |
|------------------|-----|-------------|---------------|------|
| 1 PIECE | | | | |
| PZ1 | 125 | UUSZ0138030 | 4013769440624 | D |
| PZ2 | 125 | UUSZ0138031 | 4013769440631 | D |
| PZ3 | 125 | UUSZ0138032 | 4013769440648 | D |
| 50 PIECES | | | | |
| PZ1 | 125 | U0138030/50 | 4013769440655 | B |
| PZ2 | 125 | U0138031/50 | 4013769440662 | B |
| PZ3 | 125 | U0138032/50 | 4013769440679 | B |



PHILLIPS - DIN 5260

| Taille | Lg | Ref. | Gencod | Pack |
|------------------|-----|-------------|---------------|------|
| 1 PIECE | | | | |
| PH1 | 125 | UUSZ0138021 | 4013769440686 | D |
| PH2 | 125 | UUSZ0138022 | 4013769440693 | D |
| PH3 | 125 | UUSZ0138023 | 4013769440709 | D |
| 50 PIECES | | | | |
| PH1 | 125 | U0138021/50 | 4013769440716 | B |
| PH2 | 125 | U0138022/50 | 4013769440723 | B |
| PH3 | 125 | U0138023/50 | 4013769440730 | B |

LENGTH: 150 mm

DIN 3126 E 6,3



POZIDRIV - DIN 5260

| Taille | Lg | Ref. | Gencod | Pack |
|------------------|-----|-------------|---------------|------|
| 1 PIECE | | | | |
| PZ1 | 150 | UUSZ0139030 | 4013769440839 | D |
| PZ2 | 150 | UUSZ0139031 | 4013769440846 | D |
| PZ3 | 150 | UUSZ0139032 | 4013769440853 | D |
| 50 PIECES | | | | |
| PZ1 | 150 | U0139030/50 | 4013769440860 | B |
| PZ2 | 150 | U0139031/50 | 4013769440877 | B |
| PZ3 | 150 | U0139032/50 | 4013769440884 | B |




PHILLIPS - DIN 5260

| Taille | Lg | Ref. | Gencod | Pack |
|------------------|-----|-------------|---------------|------|
| 1 PIECE | | | | |
| PH1 | 150 | UUSZ0139021 | 4013769440891 | D |
| PH2 | 150 | UUSZ0139022 | 4013769440907 | D |
| PH3 | 150 | UUSZ0139023 | 4013769440914 | D |
| 50 PIECES | | | | |
| PH1 | 150 | U0139021/50 | 4013769440921 | B |
| PH2 | 150 | U0139022/50 | 4013769440938 | B |
| PH3 | 150 | U0139023/50 | 4013769440945 | B |



TORX®

| Taille | Lg | Ref. | Gencod | Pack |
|------------------|-----|-------------|---------------|------|
| 1 PIECE | | | | |
| T20 | 150 | UUSZ0139095 | 4013769440952 | D |
| T25 | 150 | UUSZ0139096 | 4013769440969 | D |
| T30 | 150 | UUSZ0139098 | 4013769440587 | D |
| 50 PIECES | | | | |
| T20 | 150 | U0139095/50 | 4013769440594 | B |
| T25 | 150 | U0139096/50 | 4013769440600 | B |
| T30 | 150 | U0139098/50 | 4013769440617 | B |

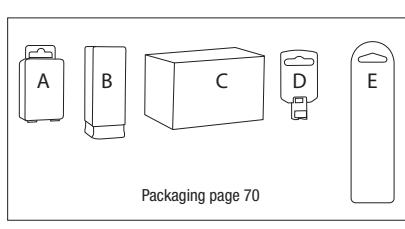

Packaging page 70

INDUSTRY PRO QUALITY SUITE

LENGTH: 200 mm

DIN 3126 E 6,3



POZIDRIV - DIN 5260

| Taille | Lg | Ref. | Gencod | Pack |
|------------------|-----|-------------|---------------|------|
| 1 PIECE | | | | |
| PZ2 | 200 | UUSZ0140031 | 4013769440549 | D |
| 50 PIECES | | | | |
| PZ2 | 200 | U0140031/50 | 4013769440556 | B |



PHILLIPS - DIN 5260

| Taille | Lg | Ref. | Gencod | Pack |
|------------------|-----|-------------|---------------|------|
| 1 PIECE | | | | |
| PH2 | 200 | UUSZ0140022 | 4013769440563 | D |
| 50 PIECES | | | | |
| PH2 | 200 | U0140022/50 | 4013769440570 | B |

LENGTH: 250 mm

DIN 3126 E 6,3



POZIDRIV - DIN 5260

| Taille | Lg | Ref. | Gencod | Pack |
|------------------|-----|-------------|---------------|------|
| 1 PIECE | | | | |
| PZ2 | 250 | UUSZ0141031 | 4013769440501 | D |
| 50 PIECES | | | | |
| PZ2 | 250 | U0141031/50 | 4013769440518 | B |



PHILLIPS - DIN 5260

| Taille | Lg | Ref. | Gencod | Pack |
|------------------|-----|-------------|---------------|------|
| 1 PIECE | | | | |
| PH2 | 250 | UUSZ0141022 | 4013769440525 | D |
| 50 PIECES | | | | |
| PH2 | 250 | U0141022/50 | 4013769440532 | B |

DOUBLE BITS

LENGTH: 50/60 mm

DIN 3126 E 6,3



SLOT - DIN 3127 POZIDRIV - DIN 5260

| Taille | Lg | Ref. | Gencod | Pack |
|----------------------|----|-------------|---------------|------|
| 5 PIECES | | | | |
| SL0,8x4-PZ1 | 60 | UUSE0112085 | 4013769438416 | A |
| SL1x5,5-PZ2 | 60 | UUSE0112086 | 4013769438423 | A |
| SL1,2x6,5-PZ3 | 60 | UUSE0112087 | 4013769438430 | A |
| 10 PIECES | | | | |
| SL0,8x4-PZ1 | 60 | UUSG0112085 | 4013769438447 | A |
| SL1x5,5-PZ2 | 60 | UUSG0112086 | 4013769280480 | A |
| SL1,2x6,5-PZ3 | 60 | UUSG0112087 | 4013769438454 | A |



SLOT - DIN 3127 PHILLIPS - DIN 5260

| Taille | Lg | Ref. | Gencod | Pack |
|----------------------|----|-------------|---------------|------|
| 5 PIECES | | | | |
| SL0,8x4-PH1 | 60 | UUSE0112081 | 4013769338280 | A |
| SL1x5,5-PH2 | 60 | UUSE0112083 | 4013769338297 | A |
| SL1,2x6,5-PH3 | 60 | UUSE0112084 | 4013769438461 | A |
| 10 PIECES | | | | |
| SL0,8x4-PH1 | 60 | UUSG0112081 | 4013769438478 | A |
| SL1x5,5-PH2 | 60 | UUSG0112083 | 4013769438485 | A |
| SL1,2x6,5-PH3 | 60 | UUSG0112084 | 4013769438492 | A |



POZIDRIV - DIN 5260

| Taille | Lg | Torsion | Ref. | Gencod | Pack |
|------------------|----|---------|-------------|---------------|------|
| 5 PIECES | | | | | |
| PH1-PH1 | 50 | | UUSE0112495 | 4013769438607 | A |
| PH2-PH2 | 50 | | UUSE0112496 | 4013769438614 | A |
| PH3-PH3 | 50 | | UUSE0112497 | 4013769438621 | A |
| 10 PIECES | | | | | |
| PH1-PH1 | 50 | x | UUSG0112495 | 4013769438638 | A |
| PH2-PH2 | 50 | x | UUSG0112496 | 4013769282569 | A |
| PH3-PH3 | 50 | x | UUSG0112497 | 4013769438645 | A |




PHILLIPS - DIN 5260

| Taille | Lg | Ref. | Gencod | Pack |
|------------------|----|-------------|---------------|------|
| 5 PIECES | | | | |
| PH1-PH1 | 50 | UUSE0112490 | 4013769438560 | A |
| PH2-PH2 | 50 | UUSE0112491 | 4013769338358 | A |
| PH3-PH3 | 50 | UUSE0112492 | 4013769438577 | A |
| 10 PIECES | | | | |
| PH1-PH1 | 50 | UUSG0112490 | 4013769438584 | A |
| PH2-PH2 | 50 | UUSG0112491 | 4013769283610 | A |
| PH3-PH3 | 50 | UUSG0112492 | 4013769438591 | A |



TORX®

| Taille | Lg | Ref. | Gencod | Pack |
|------------------|----|-------------|---------------|------|
| 5 PIECES | | | | |
| T10-T15 | 60 | UUSE0112420 | 4013769438508 | A |
| T20-T25 | 60 | UUSE0112421 | 4013769438515 | A |
| T30-T40 | 60 | UUSE0112422 | 4013769438522 | A |
| 10 PIECES | | | | |
| T10-T15 | 60 | UUSG0112420 | 4013769438539 | A |
| T20-T25 | 60 | UUSG0112421 | 4013769438546 | A |
| T30-T40 | 60 | UUSG0112422 | 4013769438553 | A |

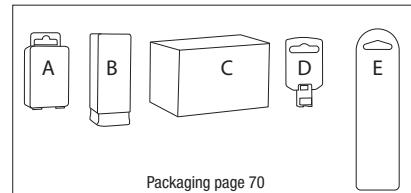

Packaging page 70



QUALITY INDUSTRY

SPECIFIC SCREW BITS

5/16"
HEX SHANK



Features

- 5/16" hex shank.
- Standard DIN hardness.
- Rust proof protection.

Benefits


- Suitable for D8 bitholder or machines.
- Fully compatible with PZ, PH, TX, HEX, SL type screw.



DIN 3126 C 8

LENGTH: 30 to 41mm

DIN 3126 C 8

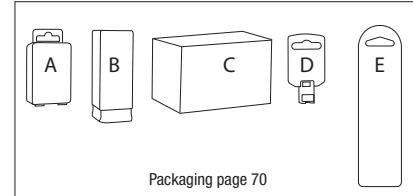

Packaging page 70



 **POZIDRIV - DIN 5260**

| Taille | Lg | Ref. | Gencod | Pack |
|-----------------|----|-------------|---------------|------|
| 5 PIECES | | | | |
| PZ1 | 32 | UUSE0012560 | 4013769436481 | A |
| PZ2 | 32 | UUSE0012561 | 4013769436498 | A |
| PZ3 | 32 | UUSE0012562 | 4013769436504 | A |
| PZ4 | 38 | UUSE0012563 | 4013769436511 | A |



 **PHILLIPS - DIN 5260**

| Taille | Lg | Ref. | Gencod | Pack |
|-----------------|----|-------------|---------------|------|
| 5 PIECES | | | | |
| PH1 | 32 | UUSE0012541 | 4013769436443 | A |
| PH2 | 32 | UUSE0012542 | 4013769436450 | A |
| PH3 | 32 | UUSE0012544 | 4013769436467 | A |
| PH4 | 38 | UUSE0012545 | 4013769436474 | A |



 **HEX - DIN 7426**

| Taille | Lg | Ref. | Gencod | Pack |
|-----------------|----|-------------|---------------|------|
| 5 PIECES | | | | |
| HEX 3 | 30 | UUSE0012571 | 4013769436313 | A |
| HEX 4 | 30 | UUSE0012572 | 4013769436320 | A |
| HEX 5 | 30 | UUSE0012573 | 4013769436337 | A |
| HEX 6 | 30 | UUSE0012574 | 4013769436344 | A |
| HEX 8 | 30 | UUSE0012576 | 4013769436351 | A |
| HEX 10 | 30 | UUSE0012577 | 4013769436368 | A |



TORX®

| Taille | Lg | Ref. | Gencod | Pack |
|-----------------|----|-------------|---------------|------|
| 5 PIECES | | | | |
| T25 | 35 | UUSE0012596 | 4013769436528 | A |
| T30 | 35 | UUSE0012598 | 4013769436535 | A |
| T40 | 35 | UUSE0012599 | 4013769436542 | A |
| T45 | 35 | UUSE0012600 | 4013769436559 | A |
| T50 | 35 | UUSE0012601 | 4013769436566 | A |
| T55 | 35 | UUSE0012602 | 4013769436573 | A |



TORX® BALL END

| Taille | Lg | Ref. | Gencod | Pack |
|-----------------|----|-------------|---------------|------|
| 5 PIECES | | | | |
| T25 K | 35 | UUSE0112596 | 4013769436580 | A |
| T30 K | 35 | UUSE0112598 | 4013769436597 | A |
| T40 K | 35 | UUSE0112599 | 4013769436603 | A |
| T45 K | 35 | UUSE0112600 | 4013769436610 | A |
| T50 K | 35 | UUSE0112601 | 4013769436627 | A |
| T55 K | 35 | UUSE0112602 | 4013769436634 | A |




SLOT - DIN 3127

| Taille | Lg | Ref. | Gencod | Pack |
|------------------|----|-------------|---------------|------|
| 5 PIECES | | | | |
| SL0,8x5,5 | 41 | UUSE0112514 | 4013769436375 | A |
| SL1x5,5 | 41 | UUSE0112515 | 4013769436382 | A |
| SL1,2x6,5 | 41 | UUSE0112516 | 4013769436399 | A |
| SL1,2x8 | 41 | UUSE0112517 | 4013769436405 | A |
| SL1,6x8 | 41 | UUSE0112518 | 4013769436412 | A |
| SL1,6x10 | 41 | UUSE0112519 | 4013769436429 | A |
| SL2x12 | 41 | UUSE0112520 | 4013769436436 | A |



INDUSTRY SPECIFIC SCREW BITS

USH,
SCREW BITS
SPECIALIST
OFFERS A
FULL RANGE
OF SPECIFIC
SHANK

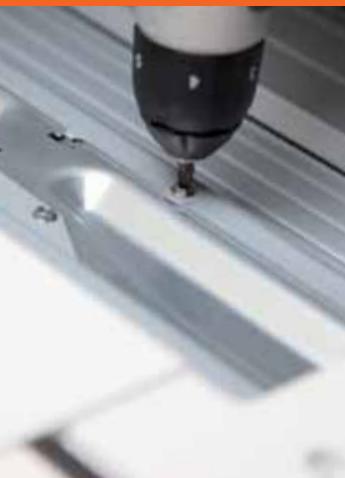

Features

- Compatible with 7 mm Fein, M5, M6, UNF 10/32", Bosch shank.
- High quality steel.
- Standard DIN hardness.
- Rust proof protection.

Benefits

- Suitable for D8 bitholder or machines.
- Ideal for difficult screw fastenings.
- Fully compatible with PZ, PH, TX, SL type screw.



COMPATIBLE



7 mm FEIN DIN 3126 G 7



5.5 mm BOSCH



1/4" DIN 3126 E 6,3



M6



M5



UNF 10/32"



FEIN - POZIDRIV - DIN 3121



| Taille | Lg | Ref. | Gencod | Pack |
|-----------------|----|-------------|---------------|------|
| 5 PIECES | | | | |
| PZ1 | 53 | UUSE0013140 | 4013769440129 | A |
| PZ2 | 53 | UUSE0013141 | 4013769440136 | A |
| PZ3 | 53 | UUSE0013142 | 4013769440143 | A |

FEIN - PHILLIPS - DIN 3121



| Taille | Lg | Ref. | Gencod | Pack |
|-----------------|----|-------------|---------------|------|
| 5 PIECES | | | | |
| PH0 | 53 | UUSE0013130 | 4013769440150 | A |
| PH1 | 53 | UUSE0013131 | 4013769440167 | A |
| PH2 | 53 | UUSE0013132 | 4013769440174 | A |
| PH3 | 53 | UUSE0013133 | 4013769440181 | A |
| PH4 | 53 | UUSE0013134 | 4013769440198 | A |

FEIN - SLOT - DIN 3121



| Taille | Lg | Ref. | Gencod | Pack |
|-----------------|----|-------------|---------------|------|
| 5 PIECES | | | | |
| SL0,5x3 | 53 | UUSE0113112 | 4013769440204 | A |
| SL0,5x4 | 53 | UUSE0113113 | 4013769440211 | A |
| SL0,6x3,5 | 53 | UUSE0113114 | 4013769440228 | A |
| SL0,6x4,5 | 53 | UUSE0113115 | 4013769440235 | A |
| SL0,8x4 | 53 | UUSE0113116 | 4013769440242 | A |
| SL0,8x5,5 | 53 | UUSE0113117 | 4013769440259 | A |
| SL1,2x6,5 | 53 | UUSE0113118 | 4013769440266 | A |
| SL1,6x8 | 53 | UUSE0113119 | 4013769440273 | A |

M5 - POZIDRIV - DIN 5260



| Taille | Lg | Ref. | Gencod | Pack |
|-----------------|----|-------------|---------------|------|
| 5 PIECES | | | | |
| PZ1 | 45 | UUSE0012151 | 4013769440280 | A |
| PZ2 | 45 | UUSE0012152 | 4013769440297 | A |
| PZ3 | 45 | UUSE0012153 | 4013769438270 | A |

M5 - PHILLIPS - DIN 5260



| Taille | Lg | Ref. | Gencod | Pack |
|-----------------|----|-------------|---------------|------|
| 5 PIECES | | | | |
| PH2 | 45 | UUSE0012142 | 4013769440303 | A |
| PH3 | 45 | UUSE0012143 | 4013769440310 | A |

M5 - TORX® - DIN 5260



| Taille | Lg | Ref. | Gencod | Pack |
|-----------------|----|-------------|---------------|------|
| 5 PIECES | | | | |
| T10 | 45 | UUSE0012154 | 4013769440327 | A |
| T15 | 45 | UUSE0012155 | 4013769440334 | A |
| T20 | 45 | UUSE0012156 | 4013769440341 | A |
| T25 | 45 | UUSE0012157 | 4013769440358 | A |
| T30 | 45 | UUSE0012158 | 4013769440365 | A |



M6 - POZIDRIV - DIN 5260



| Taille | Lg | Ref. | Gencod | Pack |
|-----------------|----|-------------|---------------|------|
| 5 PIECES | | | | |
| PZ2 | 33 | UUSE0119655 | 4013769440372 | A |



M6 - TORX®



| Taille | Lg | Ref. | Gencod | Pack |
|-----------------|----|-------------|---------------|------|
| 5 PIECES | | | | |
| T8 | 75 | UUSE0119615 | 4013769440389 | A |



M6 - TORX®



| Taille | Lg | Ref. | Gencod | Pack |
|-----------------|----|-------------|---------------|------|
| 5 PIECES | | | | |
| T25 | 47 | UUSE0119410 | 4013769440396 | A |



UNF 10/32" - PHILLIPS - DIN 5260




| Taille | Lg | Ref. | Gencod | Pack |
|-----------------|----|-------------|---------------|------|
| 5 PIECES | | | | |
| PH2 | 45 | UUSE0112160 | 4013769440402 | A |



UNF 10/32" - PHILLIPS - DIN 5260



| Taille | Lg | Ref. | Gencod | Pack |
|-----------------|----|-------------|---------------|------|
| 5 PIECES | | | | |
| PH2 | 35 | UUSE0119046 | 4013769440419 | A |

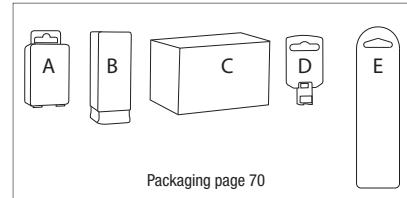

Packaging page 70



THREAD ADAPTOR 10/32"

| Taille | Lg | Ref. | Gencod | Pack |
|------------------|-----|-------------|---------------|------|
| 50 PIECES | | | | |
| 10/32" | 175 | U0011830/50 | 4013769440426 | B |



ADS 2003 RD 10/32" NF

| Taille | Lg | Ref. | Gencod | Pack |
|-----------------|----|-------------|---------------|------|
| 5 PIECES | | | | |
| 10/32" | 88 | UUSE0011837 | 4013769440433 | A |



BOSCH - TORX®



| Taille | Lg | Ref. | Gencod | Pack |
|-----------------|----|-------------|---------------|------|
| 5 PIECES | | | | |
| T20 | 50 | UUSE0103116 | 4013769440440 | A |



THREAD - 1/4"

| Taille | Lg | Ref. | Gencod | Pack |
|-----------------|----|--------------|---------------|------|
| 5 PIECES | | | | |
| M5 | 50 | UUSZ0011840N | 4013769440457 | D |
| M6 | 50 | UUSZ0011845N | 4013769440464 | D |
| M8 | 50 | UUSZ0011850N | 4013769440471 | D |
| M10 | 50 | UUSZ0011855N | 4013769440488 | D |
| M12 | 50 | UUSZ0011860N | 4013769440495 | D |



MORE THAN 1,000 SPECIAL TOOLS FOR OUR CUSTOMER

Standards are the basis for many companies. Simultaneously, special tools are developed, produced and marketed. The same applies to USH, as very often special makes offer solutions for a broad range of users. In the past five years, USH have devised more than 1,000 special tools for their customers, based on a drawing or a sample. To us it is important that the user receives the right tool in the right moment at the right place. And all this without any compromise with respect to quality.

STAINLESS STEEL

TOP QUALITY

RUST
DOESN'T
STAND A
CHANCE



Features

- Stainless steel.
- Quick lock attachment.
- Optimum corrosion protection.



Benefits

- No risk of external rust.
- External rust on stainless steel is the result of abrasion when tightening screws using ordinary steel tools. The material which wears off such tools comprises steel particles which adhere to the screws and are transformed, in the presence of oxygen, into rust. The use of stainless steel bits prevents the formation of external rust on stainless steel screws or stainless steel surfaces.
- Quick lock attachment for optimum holding in the chuck.
 - Fully compatible with PZ, PH, T, SL type screw.



ZERO RUST



1/4" DIN 3126 C 6,3

LENGTH: 25 mm

DIN 3126 C 6,3




PHILLIPS - DIN 5260

| Taille | Lg | Ref. | Gencod | Pack |
|-----------------|----|--------------|---------------|------|
| 5 PIECES | | | | |
| PH1 | 25 | UUSE0062041N | 4013769437969 | A |
| PH2 | 25 | UUSE0062042N | 4013769437976 | A |
| PH3 | 25 | UUSE0062044N | 4013769437983 | A |



POZIDRIV - DIN 5260

| Taille | Lg | Ref. | Gencod | Pack |
|-----------------|----|--------------|---------------|------|
| 5 PIECES | | | | |
| PZ1 | 25 | UUSE0062060N | 4013769437938 | A |
| PZ2 | 25 | UUSE0062061N | 4013769437945 | A |
| PZ3 | 25 | UUSE0062062N | 4013769437952 | A |

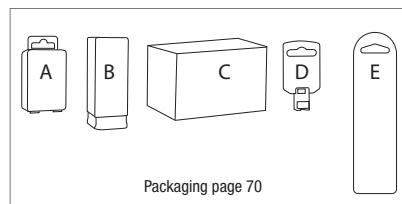

Packaging page 70



 **TORX®**

| Taille | Lg | Ref. | Gencod | Pack |
|-----------------|----|--------------|---------------|------|
| 5 PIECES | | | | |
| T10 | 25 | UUSE0062093N | 4013769437990 | A |
| T15 | 25 | UUSE0062094N | 4013769440037 | A |
| T20 | 25 | UUSE0062095N | 4013769440044 | A |
| T25 | 25 | UUSE0062096N | 4013769440051 | A |
| T30 | 25 | UUSE0062098N | 4013769440068 | A |
| T40 | 25 | UUSE0062099N | 4013769440075 | A |



 **SLOT - DIN 3127**


| Taille | Lg | Ref. | Gencod | Pack |
|------------------|----|--------------|---------------|------|
| 5 PIECES | | | | |
| SL0,8x4 | 25 | UUSE0612004N | 4013769440082 | A |
| SL0,8x5 | 25 | UUSE0062002N | 4013769440099 | A |
| SL0,8x5,5 | 25 | UUSE0612005N | 4013769440105 | A |
| SL1,2x6,5 | 25 | UUSE0612007N | 4013769440112 | A |



BITHOLDER INDUSTRY

**STRONG
RESISTANCE
TO TORSION**

**EXCELLENT
CONCENTRICITY**

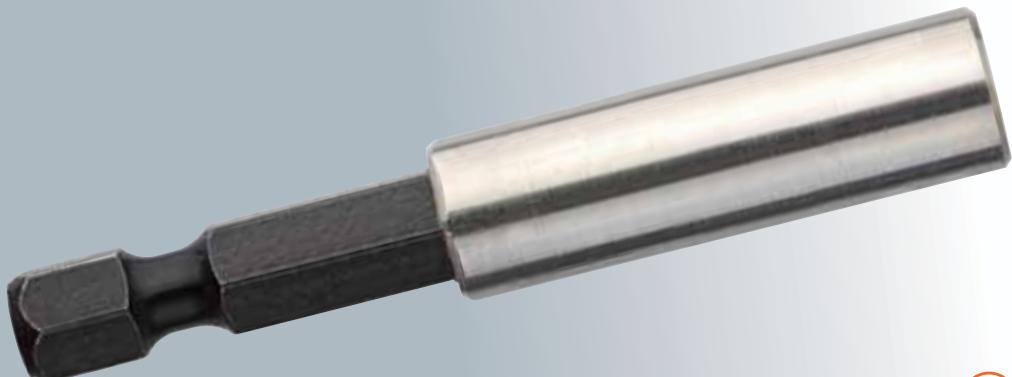

Features

- Cold forging process.
- High grade Stainless steel (according to DIN 7427).
- Bit holding ring (according to model).
- Magnetic or non magnetic according to needs.

Benefits

- Compatible with 1/4" Hex, 5/16" Desoutter, 7 mm Fein, 5,5 mm Bosch, 10 mm SDS-PLUS shanks.
- Magnetic option allows to hold the screws.
- Ring option allows to hold strongly the screw bits.
- Quick lock option.
- Ideal for hard-to-reach areas, with longer lengths (up to 250mm).



COMPATIBLE



10 mm SDS-PLUS



5,5 mm BOSCH



1/4" E 6,3



7 mm FEIN DIN 3126 G 7



5/16" Desoutter

MAGNETIC



1/4" - E 6,3

1/4"


| Lg | Ø Ext | Ref. | Gencod | Pack |
|-------------------|-------|---------------|---------------|------|
| 1 PIECE | | | | |
| 51 | 9.6 | UUSA0015008* | 4013769190680 | A |
| 51 | 9.6 | UUSA0015009 | 4013769307033 | A |
| 58 | 9.6 | UUSA0015005 | 4013769295361 | A |
| 58 | 9.6 | UUSA0015007* | 4013769123732 | A |
| 74 | 9.6 | UUSA0010052 | 4013769274847 | A |
| 74 | 11.1 | UUSA0010252 | 4013769368966 | A |
| 100 | 9.6 | UUSZ0010105 | 4013769437396 | C |
| 150 | 9.6 | UUSZ0010110 | 4013769437402 | C |
| 200 | 9.6 | UUSZ0010115 | 4013769437419 | C |
| 250 | 9.6 | UUSZ0010120 | 4013769437426 | C |
| 25 PIECES | | | | |
| 100 | 9.6 | U0010105/25 | 4013769437495 | B |
| 150 | 9.6 | U0010110/25 | 4013769437501 | B |
| 200 | 9.6 | U0010115/25 | 4013769437518 | B |
| 250 | 9.6 | U0010120/25 | 4013769437525 | B |
| 100 PIECES | | | | |
| 51 | 9.6 | U0015008/100* | 4013769437433 | B |
| 51 | 9.6 | U0015009/100 | 4013769437440 | B |
| 58 | 9.6 | U0015005/100 | 4013769437457 | B |
| 58 | 9.6 | U0015007/100* | 4013769437464 | B |
| 74 | 9.6 | U0010052/100 | 4013769437471 | B |
| 74 | 11.1 | U0010252/100 | 4013769437488 | B |



1/4" - E 6,3

1/4"

| Lg | Ø Ext | Ref. | Gencod | Pack |
|-------------------|-------|--------------|---------------|------|
| 1 PIECE | | | | |
| 51 | 13.9 | UUSA0010350 | 4013769437532 | A |
| 75 | 13.9 | UUSA0010352 | 4013769437549 | A |
| 100 PIECES | | | | |
| 51 | 13.9 | U0010350/100 | 4013769437556 | B |
| 75 | 13.9 | U0010352/100 | 4013769437563 | B |

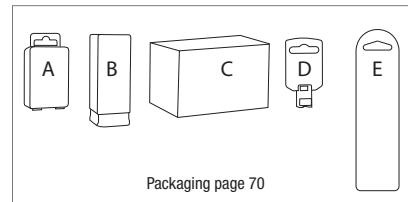

Packaging page 70

* without ring



compatible
5/16" Desoutter 1/4"

| Lg | Ø Ext | Ref. | Gencod | Pack |
|----------------|-------|-------------|---------------|------|
| 1 PIECE | | | | |
| 70 | 9.6 | UUSA0010056 | 4013769307064 | A |
| 70 | 11.1 | UUSA0010256 | 4013769437570 | A |



compatible
5.5 mm Bosch 1/4"

| Lg | Ø Ext | Ref. | Gencod | Pack |
|----------------|-------|-------------|---------------|------|
| 1 PIECE | | | | |
| 72 | 9.6 | UUSA0010060 | 4013769307071 | A |
| 72 | 11.1 | UUSA0010260 | 4013769437600 | A |



compatible
10 mm SDS-PLUS 1/4"

| Lg | Ø Ext | Ref. | Gencod | Pack |
|------------------|-------|-------------|---------------|------|
| 1 PIECE | | | | |
| 78 | 11.1 | UUSA0010288 | 4013769275028 | A |
| 50 PIECES | | | | |
| 78 | 11.1 | U0010288/50 | 4013769437662 | B |



compatible
7 mm Fein 1/4"

| Lg | Ø Ext | Ref. | Gencod | Pack |
|----------------|-------|-------------|---------------|------|
| 1 PIECE | | | | |
| 74 | 9.6 | UUSA0010064 | 4013769437631 | A |
| 74 | 11.1 | UUSA0010264 | 4013769277336 | A |

NON MAGNETIC



1/4" - E 6,3 1/4"

| Lg | Ø Ext | Ref. | Gencod | Pack |
|-------------------|-------|--------------|---------------|------|
| 1 PIECE | | | | |
| 58 | 11.1 | UUSA0011001 | 4013769437679 | A |
| 100 PIECES | | | | |
| 58 | 11.1 | U0011001/100 | 4013769437686 | B |




compatible
10 mm SDS-PLUS 1/4"

| Lg | Ø Ext | Ref. | Gencod | Pack |
|------------------|-------|-------------|---------------|------|
| 1 PIECE | | | | |
| 74 | 11.1 | UUSA0011219 | 4013769437693 | A |
| 50 PIECES | | | | |
| 74 | 11.1 | U0011219/50 | 4013769437709 | B |

FORGING TECHNOLOGY

Using the cold forging process which we developed ourselves, standard bitholders are manufactured fully automatically. Firstly, the stainless steel sleeves and the drive sections made from high-grade tool steel are connected. By applying this process, a positive high-quality and inseparable connection of both components is achieved. In this working step, the material on the drive side is compacted. This leads to an **increase in the strength**, which is responsible for the **long service life** of the magnetic bitholders. This process **guarantees excellent concentricity**. In the next step, the inner profiles of our bitholders are prepared, also using the cold forging process. In this step, the material is formed around a mandrel. This method allows us to produce a large range of shapes, thanks to the high level of flexibility in matching changing geometries. By the next compacting step the required increase in strength at the output is achieved.

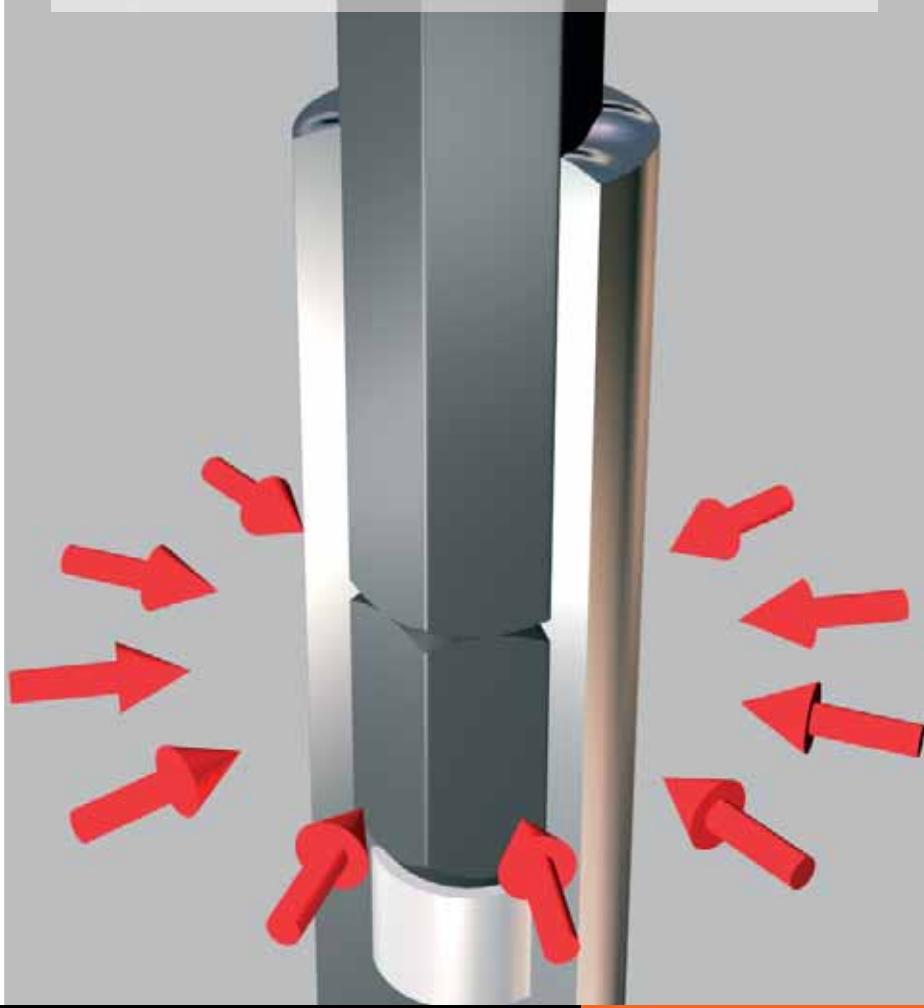

BITHOLDER BIG II

SCREW
FIRMLY HELD
ON THE BIT
THANKS TO
ADDITIONAL
RING MAGNET



Features

- Automatic adjustable magnet.
- Double permanent magnets at the bottom and exit of the bit holder (ring magnet).
- Quick lock system to hold all standard bits.
- Cold forging process.



Benefits

- Effective holding of screws with powerful magnets.
- Ideal for long screws.
- Ideal for horizontal and vertical work alike.
- Quick ejection and rapid bit change.
- Very high torsion resistance.
- Quick and precise manipulation with just one hand.
- Quick lock attachment for optimum holding in the chuck.



+ PZ2

1/4" - E 6,3 **1/4"**

| Lg | Ref. | Gencod | Pack |
|------------------|-------------|---------------|------|
| 1 PIECE | | | |
| 68 | UUSA0015490 | 4013769426499 | A |
| 50 PIECES | | | |
| 68 | U0015490/50 | 4013769437723 | B |

1/4" - E 6,3 **1/4"**

| Lg | Ref. | Gencod | Pack |
|------------------|-------------|---------------|------|
| 1 PIECE | | | |
| 68 | UUSA0015491 | 4013769437716 | A |
| 50 PIECES | | | |
| 68 | U0015491/50 | 4013769437730 | B |

BITHOLDER FOX II



EASY
INSERTION
AND
EJECTION
OF THE BITS



Features

- Quick lock system to insert the bits.
- Quick lock system to eject the bits.
- Permanent magnet.
- Cold forging process.

Benefits

- Quick and easy manipulation with just one hand.
- Very high torsion resistance.
- Quick lock attachment for optimum holding in the chuck or SDS-plus.
- Magnetic for handling the screws.



COMPATIBLE



1/4" E 6,3



10 mm SDS-PLUS



1/4" - E 6,3

1/4"

| Lg | Ref. | Gencod | Pack |
|----------------|-------------|---------------|------|
| 1 PIECE | | | |
| 60 | UUSA0010490 | 4013769384249 | A |

| Lg | Ref. | Gencod | Pack |
|------------------|-------------|---------------|------|
| 50 PIECES | | | |
| 60 | U0010490/50 | 4013769437747 | C |



1/4" - E 6,3

1/4"

| Lg | Ref. | Gencod | Pack |
|----------------|-------------|---------------|------|
| 1 PIECE | | | |
| 74 | UUSA0010492 | 4013769408020 | A |

| Lg | Ref. | Gencod | Pack |
|------------------|-------------|---------------|------|
| 50 PIECES | | | |
| 74 | U0010492/50 | 4013769437754 | C |




compatible
10 mm SDS-PLUS

1/4"

| Lg | Ref. | Gencod | Pack |
|----------------|-------------|---------------|------|
| 1 PIECE | | | |
| 80 | UUSA0010498 | 4013769414625 | A |


| Lg | Ref. | Gencod | Pack |
|------------------|-------------|---------------|------|
| 50 PIECES | | | |
| 80 | U0010498/50 | 4013769437761 | C |

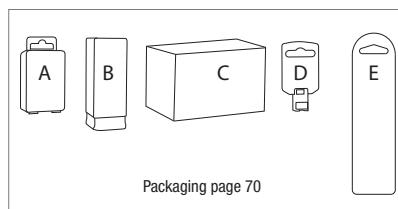

BITHOLDER

BIG & BIG MINI

IDEAL FOR
PLASTER
BOARDS

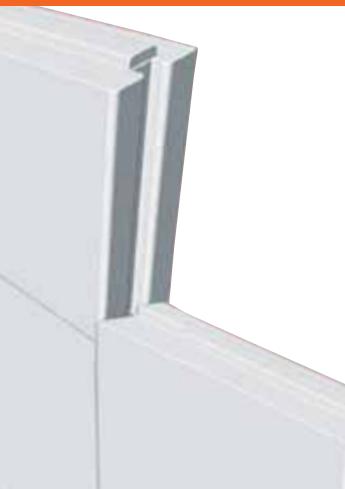

Features

- Permanent magnet.
- Deep adjustable system.
- Cold forging process.



Benefits

- Screw deep adjustment according to the job.
- Ideal for: Joinery and carpentry, door and window installation, interior works (sandwich type plaster boards and hard particle boards).
- Effective holding of screws with powerful magnets.
- Ideal for long screws.
- Quick lock attachment for optimum holding in the chuck.
- BIG is suitable with PH2, PH3, PZ2, PZ3, T 15 to 30.
- BIG Mini is suitable with PH1, PZ1, T10".



1/4" E 6,3



Magnet

BIG



1/4"- E 6,3



1/4"

| Lg | Ref. | Gencod | Pack |
|------------------|-------------|---------------|------|
| 1 PIECE | | | |
| 60 | UUSA0015026 | 4013769280756 | A |
| 50 PIECES | | | |
| 60 | U0015026/50 | 4013769437792 | C |



1/4"- E 6,3



1/4"

| Lg | Ref. | Gencod | Pack |
|------------------|-------------|---------------|------|
| 1 PIECE | | | |
| 60 | UUSA0015025 | 4013769197030 | A |
| 50 PIECES | | | |
| 60 | U0015025/50 | 4013769437808 | C |

BIG
MINI



1/4"- E 6,3



1/4"

| Lg | Ref. | Gencod | Pack |
|------------------|-------------|---------------|------|
| 1 PIECE | | | |
| 60 | UUSA0015036 | 4013769437778 | A |
| 50 PIECES | | | |
| 60 | U0015036/50 | 4013769437815 | C |



1/4"- E 6,3



1/4"

| Lg | Ref. | Gencod | Pack |
|------------------|-------------|---------------|------|
| 1 PIECE | | | |
| 60 | UUSA0015023 | 4013769437785 | A |
| 50 PIECES | | | |
| 60 | U0015023/50 | 4013769437822 | C |

BITHOLDER SPACER



USE AS
STOPVIS



Features

- Permanent magnet.
- Stopvis function.
- Deep adjustable system.
- Cold forging process.

Benefits

- Screw deep adjustment according to the job.
- Ideal for stopvis applications.
- Clean work.
- Quick lock attachment for optimum holding in the chuck.



1/4" E 6,3



Magnet



1/4" - E 6,3



1/4"

Lg

Ref.


Gencod

Pack

1 PIECE

60

UUSA0015018 4013769277329 A

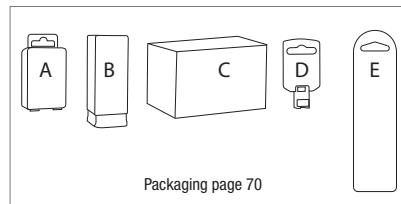


Packaging page 70



BITHOLDER SHORTY

IDEAL FOR
TIGHT
SPACES

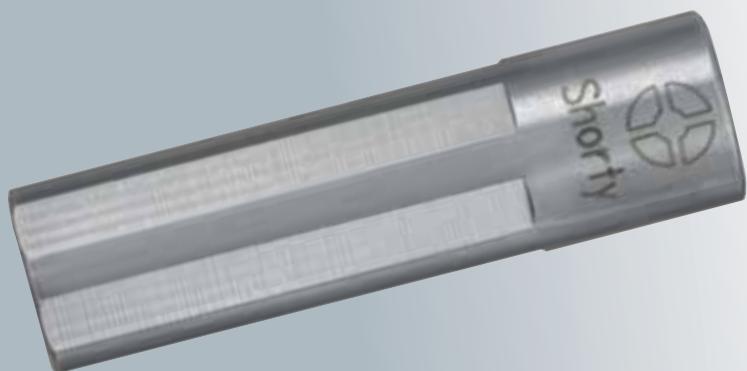

Features

- Permanent magnet.
- Cylindrical attachment.
- Short, 35 mm.




Benefits

- Its reduced length fits entirely in the chuck and makes it possible to use the power screwdriver/drill in tight spaces.
- Magnetic for handling the screws.




1/4" - E 6,3 **1/4"**

| Lg | Ref. | Gencod | Pack |
|-------------------|--------------|---------------|------|
| 1 PIECE | | | |
| 35 | UUSA0011150 | 4013769430588 | A |
| 100 PIECES | | | |
| 35 | U0011150/100 | 4013769437846 | C |

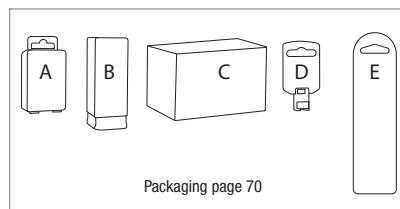

Packaging page 70

BITHOLDER COPPER BERYLLIUM

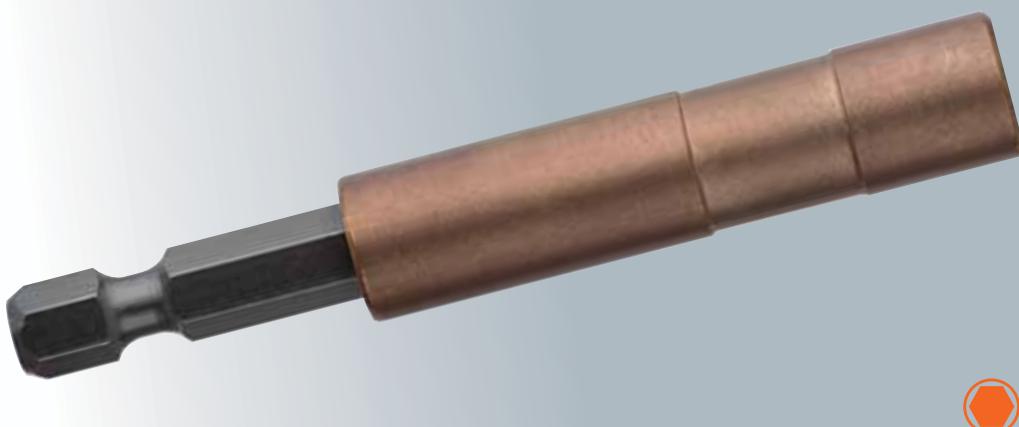

FOR VERY
HIGH TORQUES
NON-SPARKING

Features

- Cold forging process.
- Specially hardened sleeve material.
- High grade Copper Beryllium steel.
- Permanent magnet.

Benefits

- High strength and wear resistance.
- Especially suitable for industrial screw connections and screw connections with very high torques or load peaks.
- Compatible with 1/4" Hex, 5/16" Desoutter, 7 mm Fein, 5,5 mm Bosch shanks.
- Magnetic option allows to hold the screws.



COMPATIBLE



5.5 mm BOSCH



1/4" DIN 3126 E 6,3



7 mm FEIN DIN 3126 G 7



5/16" Desoutter



1/4"- E 6,3 **1/4"**

| Lg | Ref. | Gencod | Pack |
|----------------|-------------|---------------|------|
| 1 PIECE | | | |
| 74 | UUSA0010001 | 4013769437853 | A |



**compatible
5/16" Desoutter** **1/4"**

| Lg | Ref. | Gencod | Pack |
|----------------|-------------|---------------|------|
| 1 PIECE | | | |
| 70 | UUSA0010004 | 4013769437877 | A |



**compatible
5.5 mm Bosch** **1/4"**

| Lg | Ref. | Gencod | Pack |
|----------------|-------------|---------------|------|
| 1 PIECE | | | |
| 72 | UUSA0010007 | 4013769437891 | A |



**compatible
7 mm Fein** **1/4"**

| Lg | Ref. | Gencod | Pack |
|----------------|-------------|---------------|------|
| 1 PIECE | | | |
| 74 | UUSA0010010 | 4013769437914 | A |

BLISTER RANGE

SCREW BIT & BITHOLDER

AN
EASY-TO-SELL
LINE

Features

- Blister packaging.
- 4 color printing.
- Small quantity (1 or 2 pieces).

Benefits

- Attractive packaging.
- Focus on benefits.
- Space-saving dimension.



Made in
Germany



LENGTH: 25 mm



POZIDRIV - DIN 5260

| Taille | Lg | Ref. | Gencod | Pack |
|-----------------|----|----------|---------------|------|
| 2 PIECES | | | | |
| PZ1 | 25 | U0017710 | 4013769299543 | E |
| PZ2 | 25 | U0017711 | 4013769299550 | E |
| PZ3 | 25 | U0017712 | 4013769299567 | E |



PHILLIPS - DIN 5260

| Taille | Lg | Ref. | Gencod | Pack |
|-----------------|----|----------|---------------|------|
| 2 PIECES | | | | |
| PH1 | 25 | U0017701 | 4013769299512 | E |
| PH2 | 25 | U0017702 | 4013769299529 | E |
| PH3 | 25 | U0017703 | 4013769299536 | E |



TORX®

| Taille | Lg | Ref. | Gencod | Pack |
|-----------------|----|----------|---------------|------|
| 2 PIECES | | | | |
| T10 | 25 | U0017793 | 4013769299581 | E |
| T15 | 25 | U0017794 | 4013769299598 | E |
| T20 | 25 | U0017795 | 4013769299604 | E |
| T25 | 25 | U0017796 | 4013769299611 | E |
| T27 | 25 | U0017797 | 4013769349347 | E |
| T30 | 25 | U0017798 | 4013769299628 | E |
| T40 | 25 | U0017799 | 4013769299635 | E |



HEX - DIN 7426

| Taille | Lg | Ref. | Gencod | Pack |
|-----------------|----|----------|---------------|------|
| 2 PIECES | | | | |
| HEX 3 | 25 | U0017342 | 4013769177575 | E |
| HEX 4 | 25 | U0017343 | 4013769177582 | E |



SLOT - DIN 3127

| Taille | Lg | Ref. | Gencod | Pack |
|------------------|----|----------|---------------|------|
| 2 PIECES | | | | |
| SL0,6x4,5 | 25 | U0017694 | 4013769349323 | E |
| SL0,8x5,5 | 25 | U0017695 | 4013769340658 | E |
| SL1,0x5,5 | 25 | U0017696 | 4013769344250 | E |
| SL1,2x6,5 | 25 | U0017697 | 4013769348104 | E |

LENGTH: 50 mm



POZIDRIV - DIN 5260

| Taille | Lg | Ref. | Gencod | Pack |
|-----------------|----|----------|---------------|------|
| 2 PIECES | | | | |
| PZ1 | 50 | U0017218 | 4013769188878 | E |
| PZ2 | 50 | U0017219 | 4013769188885 | E |
| PZ3 | 50 | U0017220 | 4013769188892 | E |



PHILLIPS - DIN 5260

| Taille | Lg | Ref. | Gencod | Pack |
|-----------------|----|----------|---------------|------|
| 2 PIECES | | | | |
| PH1 | 50 | U0017214 | 4013769188847 | E |
| PH2 | 50 | U0017215 | 4013769188854 | E |
| PH3 | 50 | U0017216 | 4013769188861 | E |



STANDARD

| | | | |
|----------------|---------------------|------|-------------|
| | 1/4" - E 6,3 | | 1/4" |
| Lg | Ø Ext | Ref. | Gencod Pack |
| 1 PIECE | | | |

58 9.6 U0017050 4013769170507 E



BIG II

| | | | |
|----------------|---------------------|--------|-------------|
| | 1/4" - E 6,3 | | 1/4" |
| Lg | Ref. | Gencod | Pack |
| 1 PIECE | | | |

68 U0017027 4013769423955 E



FOX II

| | | | |
|----------------|---------------------|--------|-------------|
| | 1/4" - E 6,3 | | 1/4" |
| Lg | Ref. | Gencod | Pack |
| 1 PIECE | | | |

60 U0017490 4013769384188 E



BIG

| | | | |
|----------------|---------------------|--------|-------------|
| | 1/4" - E 6,3 | | 1/4" |
| Lg | Ref. | Gencod | Pack |
| 1 PIECE | | | |

60 U0017026 4013769012043 E



BIG

| | | | |
|----------------|---------------------|--------|-------------|
| | 1/4" - E 6,3 | | 1/4" |
| Lg | Ref. | Gencod | Pack |
| 1 PIECE | | | |

60 U0017025 4013769012050 E



BIG MINI

| | | | |
|----------------|---------------------|--------|-------------|
| | 1/4" - E 6,3 | | 1/4" |
| Lg | Ref. | Gencod | Pack |
| 1 PIECE | | | |

60 U0017023 4013769174727 E



SPACER

| | | | |
|----------------|---------------------|--------|-------------|
| | 1/4" - E 6,3 | | 1/4" |
| Lg | Ref. | Gencod | Pack |
| 1 PIECE | | | |

60 U0017170 4013769171702 E

SOCKET POWER IMPACT

**SAFE
HOLDING OF
THE SCREW
FOR QUICKER
INSTALLATION**



Features

- Quick lock attachment.
- Permanent magnet.
- Magnetic sockets are used in manufacturing assembly systems and others applications.



COMPATIBLE



7 mm FEIN DIN 3126 G 7 1/4" E 6,3

Benefits

- Quick lock attachment for optimum holding in the chuck.
- Powerful magnet for holding screws.



Hexagonal
1/4" - E 6,3



Hexagonal
1/4" - E 6,3



| Taille | Lg | Ref. | Gencod | Pack |
|------------------|----|-------------|---------------|------|
| 1 PIECE | | | | |
| SW5 | 50 | UUSZ0010663 | 4013769437044 | D |
| SW5.5 | 50 | UUSZ0010664 | 4013769437051 | D |
| SW6 | 50 | UUSZ0010665 | 4013769437068 | D |
| SW1/4 | 50 | UUSZ0010666 | 4013769437075 | D |
| SW7 | 50 | UUSZ0010667 | 4013769437082 | D |
| SW8 | 50 | UUSZ0010668 | 4013769437099 | D |
| SW5/16 | 50 | UUSZ0010670 | 4013769437105 | D |
| SW10 | 50 | UUSZ0010671 | 4013769437112 | D |
| SW11 | 50 | UUSZ0010672 | 4013769437129 | D |
| SW12 | 50 | UUSZ0010673 | 4013769437136 | D |
| SW13 | 50 | UUSZ0010674 | 4013769437143 | D |
| SW3/8 | 50 | UUSZ0010676 | 4013769437150 | D |
| 50 PIECES | | | | |
| SW8 | 50 | U0010668/50 | 4013769437167 | C |
| SW10 | 50 | U0010671/50 | 4013769437174 | C |
| SW3/8 | 50 | U0010676/50 | 4013769437181 | C |

| Taille | Lg | Ref. | Gencod | Pack |
|----------------|----|-------------|---------------|------|
| 1 PIECE | | | | |
| SW5 | 65 | UUSZ0010683 | 4013769437198 | D |
| SW5.5 | 65 | UUSZ0010684 | 4013769437204 | D |
| SW6 | 65 | UUSZ0010685 | 4013769437211 | D |
| SW1/4 | 65 | UUSZ0010686 | 4013769437228 | D |
| SW7 | 65 | UUSZ0010687 | 4013769437235 | D |
| SW8 | 65 | UUSZ0010688 | 4013769437242 | D |
| SW5/16 | 65 | UUSZ0010690 | 4013769437259 | D |
| SW10 | 65 | UUSZ0010691 | 4013769437266 | D |
| SW11 | 65 | UUSZ0010694 | 4013769437273 | D |
| SW13 | 65 | UUSZ0010696 | 4013769437280 | D |



Hexagonal
1/4" - C 6,3



ADAPTOR



Hexagonal
1/4" - E 6,3



| Lg | Ref. | Gencod | Pack |
|----------------|-------------|---------------|------|
| 1 PIECE | | | |
| 50 | UUSZ0013050 | 4013769437358 | D |



Hexagonal
1/4" - E 6,3



| Lg | Ref. | Gencod | Pack |
|----------------|-------------|---------------|------|
| 1 PIECE | | | |
| 50 | UUSZ0013052 | 4013769437365 | D |



Hexagonal
7 mm Fein



| Lg | Ref. | Gencod | Pack |
|----------------|-------------|---------------|------|
| 1 PIECE | | | |
| 50 | UUSA0013160 | 4013769437389 | A |

SOCKET SURFACE PROTECTION POWER IMPACT



SPECIAL FOR
PLASTIC
COATING OR
STAINLESS
STEEL
SCREWS

Features

- Quick-lock attachment.
- Mechanical screw holding system (ball/spring).



1/4" E 6,3

Benefits

- Specially adapted for screws used for fastening fronts or sandwich panels and self-drilling screws.
- The system that holds the screw head in the socket is specially designed for working with painted or plastic finishes.
- Quick lock attachment for optimum holding in the chuck.




1/4"



1/4"

| Taille | Lg | Ref. | Gencod | Pack |
|----------------|----|-------------|---------------|------|
| 1 PIECE | | | | |
| SW1/4 | 50 | UUSZ0111686 | 4013769437297 | D |
| SW7 | 50 | UUSZ0111687 | 4013769437303 | D |
| SW8 | 50 | UUSZ0111688 | 4013769437310 | D |
| SW5/16 | 50 | UUSZ0111690 | 4013769437327 | D |
| SW10 | 50 | UUSZ0111691 | 4013769437334 | D |
| SW3/8 | 50 | UUSZ0111696 | 4013769437341 | D |

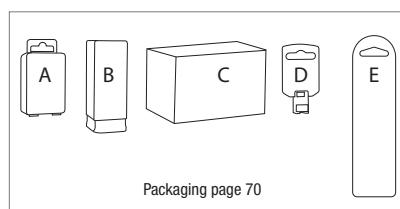

SCREWDRIVER FOR BITS

THE COMPLETE TOOL

ALL-IN-ONE



Features

- Ratchet function.
- Telescope shank.
- Magazine screwdriver with 8 bits.
- Ergonomic handle.



Benefits

- Clockwise rotation, anticlockwise rotation.
- Adjustment of the length 192-267 mm - with a firm interlock.
- 8 bits: Ph 1, Ph 2, Pz 1, Pz 2, Torx T 15, T 20, T 25, T 30.



Magnet



| Composition | Lg | Ref. | Gencod | Pack |
|--|---------|----------------|---------------|------|
| 1 PIECE Magnetic - Extensible hand screwdriver + 8 screw bits PH1-PH2-PZ1-PZ2 T15-T20-T25-T30 | 195-280 | U42020-192-267 | 4013769376336 | BULK |



1/4"

| Lg | Ref. | Gencod | Pack |
|----------------|----------|---------------|------|
| 1 PIECE | | | |
| 130 | U0014010 | 4013769140104 | BULK |



1/4"

| Lg | Ref. | Gencod | Pack |
|----------------|----------|---------------|------|
| 1 PIECE | | | |
| 270 | U0014012 | 4013769140128 | BULK |



1/4"

| Lg | Ref. | Gencod | Pack |
|----------------|----------|---------------|------|
| 1 PIECE | | | |
| 270 | U0014015 | 4013769140159 | BULK |



1/4"

| Lg | Ref. | Gencod | Pack |
|----------------|----------|---------------|------|
| 1 PIECE | | | |
| 190 | U0014030 | 4013769140302 | BULK |




1/4"

| Lg | Ref. | Gencod | Pack |
|----------------|----------|---------------|------|
| 1 PIECE | | | |
| 80 | U0014009 | 4013769140098 | BULK |



1/4"

| Lg | Ref. | Gencod | Pack |
|----------------|----------|---------------|------|
| 1 PIECE | | | |
| 180 | U0014016 | 4013769140166 | BULK |

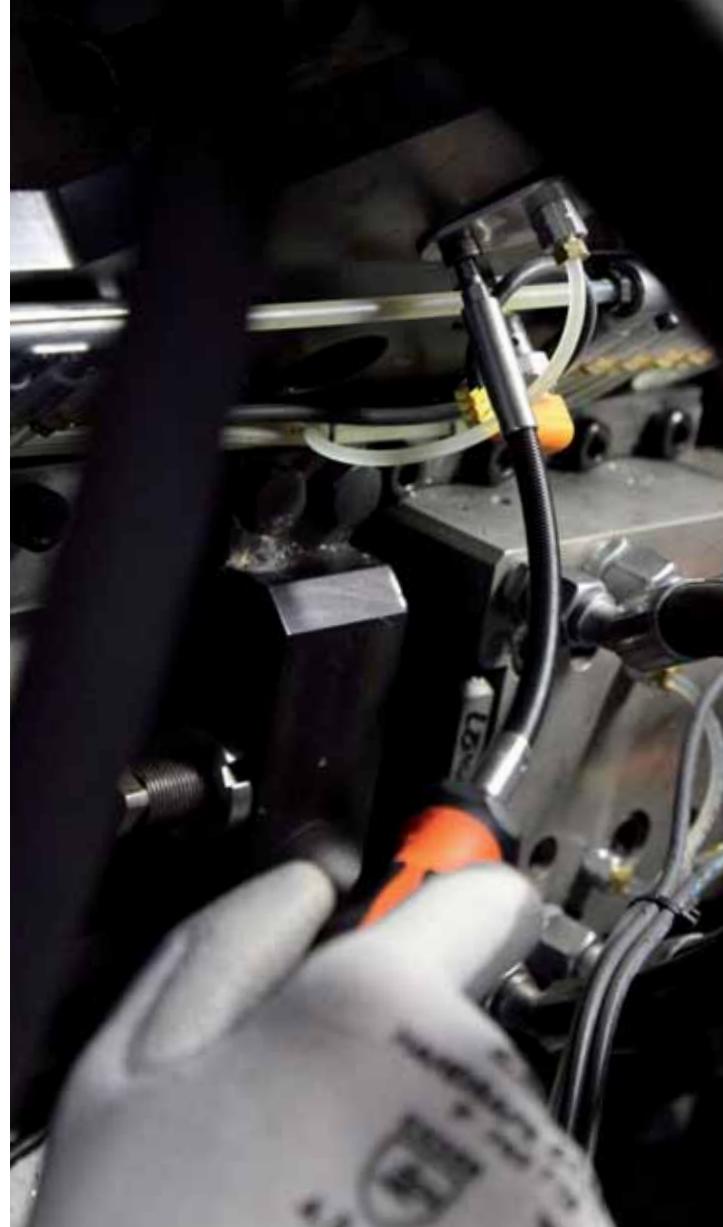

GAMME SETS

DIATIN®



Diatin® Flatbox 7 pcs - PH-PZ-SL bits + FOX II

| Composition | Ref. | Gencod |
|---|----------|---------------|
| 7 PIECES | | |
| 1 FoX II magnetic holder 1/4" Diatin screw bits : Ph 1, Ph 2, Pz 1, Pz 2, sl 0.8 x 5.5 - sl 1.2 x 6.5 | U0006200 | 4013769119858 |



Diatin® Flatbox 7 pcs - T bits + FOX II

| Composition | Ref. | Gencod |
|---|----------|---------------|
| 7 PIECES | | |
| 1 FoX II magnetic holder 1/4" T 10, T 15, T 20, T 25, T 30, T 40 | U0006220 | 4013769119872 |



Diatin® Flatbox 7 pcs - PH-PZ bits + FOX II

| Composition | Ref. | Gencod |
|---|----------|---------------|
| 7 PIECES | | |
| 1 FoX II magnetic holder 1/4" Diatin screw bits : Ph 1, Ph 2, Ph 3, Pz 1, Pz 2, Pz 3 | U0006240 | 4013769119902 |



Diatin® Flatbox 12 pcs - PH-PZ-SL bits + FOX II

| Composition | Ref. | Gencod |
|---|----------|---------------|
| 12 PIECES | | |
| 1 FoX II magnetic holder 1/4" Diatin screw bits : Ph 1, 2 x Ph 2, Ph 3, Pz 1, 2 x Pz 2, Pz 3 sl 0.6 x 4.5 - sl 0.8 x 5.5 - sl 1.2 x 6.5 | U0007200 | 4013769277237 |



Diatin® Flatbox 12 pcs - T bits + FOX II

| Composition | Ref. | Gencod |
|---|----------|---------------|
| 12 PIECES | | |
| 1 FoX II magnetic holder 1/4" Diatin screw bits : T 10, 2 x T 15, 2 x T 20 2 x T 25, T 27, 2 x T 30, T 40 | U0007220 | 4013769290908 |



ISOTIN®



Isotin® Container 36 pcs - PH-PZ-T-HEX-SL bits + BIG

| Composition | Ref. | Gencod |
|--|----------|---------------|
| 36 PIECES | | |
| 1 BIG magnetic holder 1/4" | | |
| Isotin screw bits : 2 Torsion bits each Ph 1, Ph 3, Pz 1, Pz 3 | U0004910 | 4013769385062 |
| 3 Torsion bits each Ph 2, Pz 2 | | |
| 1 Torsion bit each Tx 10 - 15 - 20 - 25 - 27 - 30 - 40 | | |
| hex 2.0 - 2.5 - 3.0 - 4.0 - 5.0 - 6.0 - 8.0 | | |
| sl 4.0 - 4.5 - 5.0 - 5.5 - 6.0 - 6.5 - 8.0 | | |



Isotin® Flatbox 7 pcs - PH-PZ-SL bits + BIG

| Composition | Ref. | Gencod |
|--|----------|---------------|
| 7 PIECES | | |
| 1 BIG magnetic holder 1/4" | | |
| Isotin screw bits : Ph 1, Ph 2, Pz 1, Pz 2, sl 0.8 x 5.5 - sl 1.2 x 6.5 | U0006100 | 4013769121103 |



Isotin® Flatbox 7 pcs - T bits + BIG

| Composition | Ref. | Gencod |
|--|----------|---------------|
| 7 PIECES | | |
| 1 BIG magnetic holder 1/4" | | |
| Isotin screw bits : T 10, T 15, T 20, T 25, T 30, T 40 | U0006120 | 4013769121158 |



Isotin® Flatbox 7 pcs - PH-PZ bits + BIG

| Composition | Ref. | Gencod |
|--|----------|---------------|
| 7 PIECES | | |
| 1 BIG magnetic holder 1/4" | | |
| Isotin screw bits : Ph 1, Ph 2, Ph 3, Pz 1, Pz 2, Pz 3 | U0006140 | 4013769121172 |



Isotin® Flatbox 12 pcs - PH-PZ-SL bits + BIG

| Composition | Ref. | Gencod |
|---|----------|---------------|
| 12 PIECES | | |
| 1 BIG magnetic holder 1/4" | | |
| Isotin screw bits : Ph 1, 2 x Ph 2, Ph 3 - Pz 1, 2 x Pz 2, Pz 3 sl 0.6 x 4.5 - sl 0.8 x 5.5 - sl 1.2 x 6.5 | U0007100 | 4013769277220 |



Isotin® Flatbox 12 pcs - T bits + BIG

| Composition | Ref. | Gencod |
|---|----------|---------------|
| 12 PIECES | | |
| 1 BIG magnetic holder 1/4" | | |
| Isotin screw bits : T 10, 2 x T 15, 2 x T 20, 2 x T 25, T 27, 2 x T 30, T 40 | U0007120 | 4013769277213 |

GAMME SETS

INDUSTRY



Industry T-Box 19 pcs - PH-PZ-T-HEX-SL

| Composition | Ref. | Gencod |
|--|----------|---------------|
| 19 PIECES | | |
| 1 FoX II magnetic holder 1/4" Industry screw bits : Ph 1, Ph 2, Ph 3, Pz 1, Pz 2, Pz 3 T 10, T 15, T 20, T 25, T 30, T 40 Hex 3 - 4 - 5 SI 0,6 x 4,5 - SI 0,8 x 5,5 - SI 1,2 x 6,5 | U0004600 | 4013769426437 |



Industry Container 36 pcs - PH-PZ-T-HEX-SL bits + Bitholder

| Composition | Ref. | Gencod |
|--|----------|---------------|
| 36 PIECES | | |
| 1 stainless steel standard magnetic holder 1/4" Industry screw bits each Ph 1 Ph 3, Pz 1, Pz 3 3 Torsion bits each Ph 2, Pz 2 1 Torsion bit each T 10 - 15 - 20 - 25 - 27 - 30 - 40 Hex 2.0 - 2.5 - 3.0 - 4.0 - 5.0 - 6.0 - 8.0 SI 4.0 - 4.5 - 5.0 - 5.5 - 6.0 - 6.5 - 8.0 | U0004900 | 4013769353559 |



Industry Container 80 pcs - Safety bits + FOX II + Screwdriver

| Composition | Ref. | Gencod |
|---|----------|---------------|
| 80 PIECES | | |
| 1 FoX II magnetic holder 1/4" 1 [complete] hand screwdriver with 8 bits (Ph 1, Ph 2, Pz 1, Pz 2, Torx T 15, T 20, T 25, T 30) Industry screw bits SI 0,5x3,0 - 0,6x4,5 - 0,8x5,5 (x2) - 1,2x6,5 - 1,6x8,0 Ph 0 - 1 - 2(x4) - 3(x2) Pz 1 - 2(x4) - 3(x2) Tx 10 - 15 - 20(x2) - 25(x2) - 27 - 30 - 40 Hex 2.0 - 2.5 - 3.0 - 4.0 - 5.0 - 6.0 - 7.0 - 8.0 Tw 1 - 2 - 3 - 4 - 5 Ts 5 - 6 - 8 - 10 Square 0 - 1 - 2 - 3 Tx Ta 10 - 15 - 20 - 25 - 30 - 40 hex Ta 3.0 - 4.0 - 5.0 - 6.0 Spanner 4 - 6 - 8 - 10 / Tx 05 - 06 - 07 - 08 - 09 | U0004920 | 4013769378576 |



Industry Container 45 pcs - Bits + Sockets + FOX II + Screwdriver

| Composition | Ref. | Gencod |
|---|----------|---------------|
| 45 PIECES | | |
| 1 Screwdriver Ratchet 1x 1/4" female square adaptor on 1/4" hexagon for C 6,3 Bits 1x 1/4" square adaptor on hexagon E6,3 - 50mm 1 FoX II magnetic holder 1/4" 1 [complete] hand screwdriver with 8 bits (Ph 1, Ph 2, Pz 1, Pz 2, Torx T 15, T 20, T 25, T 30) Industry screw bits : SI 0,5x3,0-0,6x4,5-0,8x5,5-1,0x5,5-1,2x6,5-1,6x8,0 Ph 1(x2) - 2(x2) - 3(x2) Pz 1(x2) - 2(x2) - 3(x2) Hex 2,5-3,0-4,0-5,0-6,0-7,0 Tx 10-15-20-25-30-40 Sw 5,6,7,8,9,10,11,12,13,14 sockets | U0004320 | 4013769413253 |



Industry Flatbox 7 pcs - PH-PZ-SL bits + Bitholder

| Composition | Ref. | Gencod |
|---|----------|---------------|
| 7 PIECES | | |
| 1 stainless steel standard magnetic holder 1/4" Industry screw bits : Ph 1, Ph 2, Pz 1, Pz 2, SI 0.8 x 5.5 - SI 1.2 x 6.5 | U0006000 | 4013769119797 |



Industry Flatbox 7 pcs - T bits + Bitholder

| Composition | Ref. | Gencod |
|---|----------|---------------|
| 7 PIECES | | |
| 1 stainless steel standard magnetic holder 1/4" Industry screw bits : T 10, T 15, T 20, T 25, T 30, T 40 | U0006020 | 4013769119810 |



Industry Flatbox 7 pcs - PH-PZ bits + Bitholder

| Composition | Ref. | Gencod |
|---|----------|---------------|
| 7 PIECES | | |
| 1 stainless steel standard magnetic holder 1/4" Industry screw bits : Ph 1, Ph 2, Ph 3, Pz 1, Pz 2, Pz 3 | U0006040 | 4013769119834 |



Industry Flatbox 12 pcs - PH-PZ-SL bits + Bitholder

| Composition | Ref. | Gencod |
|---|----------|---------------|
| 12 PIECES | | |
| 1 stainless steel standard magnetic holder 1/4" Industry screw bits : Ph 1, 2 x Ph 2, Ph 3 Pz 1, 2 x Pz 2, Pz 3 SI 0.6 x 4.5 - SI 0.8 x 5.5 - SI 1.2 x 6.5 | U0007000 | 4013769277206 |



Industry Flatbox 12 pcs - T bits + Bitholder

| Composition | Ref. | Gencod |
|--|----------|---------------|
| 12 PIECES | | |
| 1 stainless steel standard magnetic holder 1/4" Industry screw bits : T 10, T 15(x2), T 20(x2), T 25(x2), T 27, T 30(x2), T 40 | U0007020 | 4013769280039 |



Industry Flatbox 31 pcs - Safety bits + Bitholder

| Composition | Ref. | Gencod |
|---|----------|---------------|
| 31 PIECES | | |
| 1 stainless steel standard magnetic holder 1/4" Industry screw bits 1 security bits each Torx Tamper T 8, 9, 10, 15, 20, 25, 27, 30, 40 Hex tamper SW 3,0 - 4,0 - 5,0 - 6,0 Spanner 4 - 6 - 8 - 10 Square 0 - 1 - 2 - 3 Tri-wing® 1 - 2 - 3 - 4 - 5 Torq set 5 - 6 - 8 - 10 | U0006908 | 4013769379351 |




GAMME SETS

SOCKET

Standard Power Impact socket Set - 7 pcs

| Composition | Ref. | Gencod |
|--|----------|---------------|
| 7 PIECES | | |
| Standard Power Impact socket - 1/4" E 6,3 x 50 mm overall length - magnetic - HEX 1/4 - HEX7 - HEX8 - HEX3/8 - HEX10 - HEX12 - HEX13 | U0005000 | 4013769312785 |

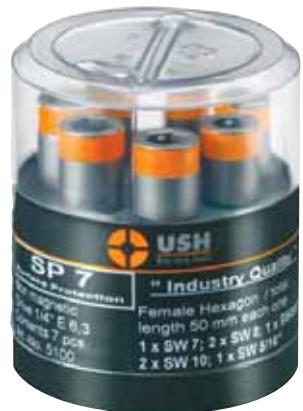

EXTRACTOR

Screw Extractor Set - 5 pcs

| Composition | Ref. | Gencod |
|---|----------|---------------|
| 5 PIECES | | |
| Screw extractors set - Size 1 - 2 - 3 - 4 - 5 | U5050153 | 4019321501536 |



Screw Extractor Set - 8 pcs

| Composition | Ref. | Gencod |
|---|----------|---------------|
| 8 PIECES | | |
| Screw extractors set - Size 1 - 2 - 3 - 4 - 5 - 6 - 7 - 8 | U5050183 | 4019321501833 |

DISPLAY

BITHOLDER

Display in plexiglass - 25x BIG II bitholders

| Composition | Ref. | Gencod |
|---|----------|---------------|
| 25 PIECES | | |
| Display in plexiglass - 25x BIG II bitholders | U0016490 | 4013769423887 |



SCREWDRIVER

Display - x12

**Magnetic - Extensible hand screwdriver
+ 8 screw bits (PH1-PH2-PZ1-PZ2-T15-T20-T25-T30)**

| Composition | Ref. | Gencod |
|------------------------------|---------------|---------------|
| 12 PIECES | | |
| Display - 12x U42020-192-267 | UUSH42020M267 | 4013769392831 |



INDUSTRY



Display - x10

Industry Container 36 pcs - PH-PZ-T6HEX-SL bits + Bitholder

| Composition | Ref. | Gencod |
|------------------------|-------------|---------------|
| 10 PIECES | | |
| Display - 10x U0004901 | UUSG0004900 | 4013769382818 |



Display - x5

Industry Container 80 pcs - Safety bits + FOXII + Screwdriver

| Composition | Ref. | Gencod |
|-----------------------|-------------|---------------|
| 10 PIECES | | |
| Display - 5x U0004920 | UUSE0004920 | 4013769384621 |



Display - x5

Industry Container 45 pcs - Bits + Sockets + FOXII + Screwdriver

| Composition | Ref. | Gencod |
|-----------------------|-------------|---------------|
| 10 PIECES | | |
| Display - 5x U0004320 | UUSE0004320 | 4013769413291 |



CONCRETE 3 CUTTINGS

COMPATIBLE SDS-PLUS

DRILL
REBAR

DOESN'T
CRACK
CONCRETE



Features

- Monobloc carbide tip with self-centering point.
- Tip angle 135°.
- 3 cutting edges.
- 2 shape designs: half-round and square.
- Compatible SDS-plus shank.

Benefits

- The 3 cutting edges monobloc tip is the solution for all concrete drilling.
- The self-centering tip allows more precision.
- The tip design guarantees a concentric hole.
- The square flute accelerates dust extraction and improves the drill bit life time.



| Ø | Ref. | Gencod | Qt. |
|------------------|----------------|---------------|-----|
| L 50x10 | | | |
| 5 | 113YD05L0110 | 4013769434623 | 1 |
| 6 | 113YD06L0110 | 4013769431745 | 1 |
| 6,5 | 113YD06,5L0110 | 4013769431707 | 1 |
| 7 | 113YD07L0110 | 4013769431783 | 1 |
| 8 | 113YD08L0110 | 4013769431813 | 1 |
| 10 | 113YD10L0110 | 4013769431875 | 1 |
| L 100x160 | | | |
| 5 | 113YD05L0160 | 4013769431691 | 1 |
| 6 | 113YD06L0160 | 4013769431752 | 1 |
| 6,5 | 113YD06,5L0160 | 4013769431714 | 1 |
| 7 | 113YD07L0160 | 4013769431790 | 1 |
| 8 | 113YD08L0160 | 4013769431820 | 1 |
| 10 | 113YD10L0160 | 4013769431882 | 1 |
| 12 | 113YD12L0160 | 4013769431943 | 1 |
| 13 | 113YD13L0160 | 4013769431998 | 1 |
| 14 | 113YD14L0160 | 4013769432001 | 1 |
| 16 | 113YD16L0160 | 4013769432063 | 1 |
| L 150x210 | | | |
| 6 | 113YD06L0210 | 4013769431769 | 1 |
| 6,5 | 113YD06,5L0210 | 4013769431721 | 1 |
| 7 | 113YD07L0210 | 4013769431806 | 1 |
| 8 | 113YD08L0210 | 4013769431837 | 1 |
| 10 | 113YD10L0210 | 4013769431899 | 1 |
| 12 | 113YD12L0210 | 4013769431950 | 1 |
| 14 | 113YD14L0210 | 4013769432018 | 1 |
| 16 | 113YD16L0210 | 4013769432070 | 1 |
| 18 | 113YD18L0210 | 4013769432117 | 1 |
| 20 | 113YD20L0210 | 4013769432148 | 1 |

| Ø | Ref. | Gencod | Qt. |
|------------------|----------------|---------------|-----|
| L 200x260 | | | |
| 6 | 113YD06L0260 | 4013769431776 | 1 |
| 6,5 | 113YD06,5L0260 | 4013769431738 | 1 |
| 8 | 113YD08L0260 | 4013769431844 | 1 |
| 10 | 113YD10L0260 | 4013769431905 | 1 |
| 12 | 113YD12L0260 | 4013769431967 | 1 |
| L 250x310 | | | |
| 8 | 113YD08L0310 | 4013769431851 | 1 |
| 10 | 113YD10L0310 | 4013769431912 | 1 |
| 12 | 113YD12L0310 | 4013769431974 | 1 |
| 14 | 113YD14L0310 | 4013769432032 | 1 |
| 15 | 113YD15L0310 | 4013769434630 | 1 |
| 16 | 113YD16L0310 | 4013769432094 | 1 |
| 18 | 113YD18L0310 | 4013769432124 | 1 |
| 20 | 113YD20L0310 | 4013769432155 | 1 |
| L 400x460 | | | |
| 8 | 113YD08L0460 | 4013769431868 | 1 |
| 10 | 113YD10L0460 | 4013769431929 | 1 |
| 12 | 113YD12L0460 | 4013769431981 | 1 |
| 14 | 113YD14L0460 | 4013769432049 | 1 |
| 16 | 113YD16L0460 | 4013769432100 | 1 |
| 18 | 113YD18L0460 | 4013769432131 | 1 |
| 20 | 113YD20L0460 | 4013769432162 | 1 |
| L 550x610 | | | |
| 10 | 113YD10L0610 | 4013769431936 | 1 |

PLASTIC BOX

X 12 PIECES



| Ø | Ref. | Gencod | Qt. |
|------------------|----------------|---------------|------------|
| L 50x110 | | | |
| 5 | 138YD05L0110 | 4013769433022 | 1 |
| 6 | 138YD06L0110 | 4013769433053 | 1 |
| 8 | 138YD08L0110 | 4013769433091 | 1 |
| L 100x160 | | | |
| 5 | 138YD05L0160 | 4013769433039 | 1 |
| 6 | 138YD06L0160 | 4013769433060 | 1 |
| 8 | 138YD08L0160 | 4013769433107 | 1 |
| 10 | 138YD10L0160 | 4013769433145 | 1 |
| 12 | 138YD12L0160 | 4013769433206 | 1 |
| L 150x210 | | | |
| 6 | 138YD06L0210 | 4013769433077 | 1 |
| 6,5 | 138YD06,5L0210 | 4013769433046 | 1 |
| 8 | 138YD08L0210 | 4013769433114 | 1 |
| 10 | 138YD10L0210 | 4013769433152 | 1 |
| 12 | 138YD12L0210 | 4013769433213 | 1 |
| L 200x260 | | | |
| 6 | 138YD06L0260 | 4013769433084 | 1 |
| 8 | 138YD08L0260 | 4013769433121 | 1 |
| 10 | 138YD10L0260 | 4013769433169 | 1 |
| 12 | 138YD12L0260 | 4013769433220 | 1 |
| 16 | 138YD16L0260 | 4013769433268 | 1 |
| L 250x310 | | | |
| 8 | 138YD08L0310 | 4013769433138 | 1 |
| 10 | 138YD10L0310 | 4013769433176 | 1 |
| 12 | 138YD12L0310 | 4013769433237 | 1 |
| L 400x460 | | | |
| 10 | 138YD10L0460 | 4013769433183 | 1 |
| 12 | 138YD12L0460 | 4013769433244 | 1 |
| L 550x610 | | | |
| 10 | 138YD10L0610 | 4013769433190 | 1 |
| 12 | 138YD12L0610 | 4013769433251 | 1 |

X 25 PIECES

| Ø | Ref. | Gencod | Qt. |
|------------------|--------------|---------------|------------|
| L 50x110 | | | |
| 6 | 157YD06L0160 | 4013769433275 | 1 |
| 8 | 157YD08L0160 | 4013769433305 | 1 |
| 10 | 157YD10L0160 | 4013769433336 | 1 |
| L 150x210 | | | |
| 6 | 157YD06L0210 | 4013769433282 | 1 |
| 8 | 157YD08L0210 | 4013769433312 | 1 |
| 10 | 157YD10L0210 | 4013769433343 | 1 |
| 12 | 157YD12L0210 | 4013769433350 | 1 |



PRÜFGEMEINSCHAFT

The PGM is an independent body which certifies hammer and straight shank drill bits since 1978.

He stays up the standards, and, checks products and policies of quality monitoring of the manufacturers. Drill bits have to meet the requirements of a strict specifications with the aim of allowing safe anchorings. These controls carry among others, on the diameter, the centring of the carbide tip, the straightness of drill bits. Certified drill bits are stamped with the PGM logo with the manufacturer number.




CONCRETE 2 CUTTINGS

COMPATIBLE SDS-PLUS

LONGER
LIFE
TIME

SPEED

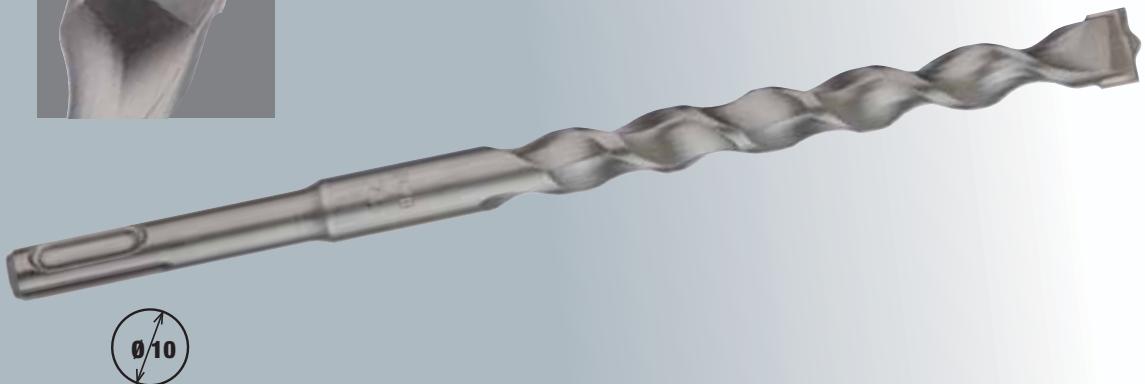

Features

- Centring tip with "Z" geometry.
- Wave profile with 3 effectives supporting points.
- The new flute offers 2 shape designs: half-round and square.
- Compatible SDS-plus shank.

Benefits

- The 3 tips pressure points concentrate hammer force in line with the drilling axis, thus increasing speed and destructive power.
- The power of the centring tip power improves penetration into materials, the chiselling effect, and the drilling accuracy.
- The new helix geometry optimises the dust removal to guarantee speed, wear resistance, and service life.



Ø Ref. Gencod Qt.

L 50x110

| Ø | Ref. | Gencod | Qt. |
|-----------|--------------|---------------|-----|
| 4 | 118YD04L0110 | 4013769432230 | 1 |
| 5 | 118YD05L0110 | 4013769432247 | 1 |
| 6 | 118YD06L0110 | 4013769432292 | 1 |
| 7 | 118YD07L0110 | 4013769432347 | 1 |
| 8 | 118YD08L0110 | 4013769432346 | 1 |
| 10 | 118YD10L0110 | 4013769432414 | 1 |

L 100x160

| Ø | Ref. | Gencod | Qt. |
|------------|----------------|---------------|-----|
| 5 | 118YD05L0160 | 4013769432254 | 1 |
| 6 | 118YD06L0160 | 4013769432308 | 1 |
| 6,5 | 118YD06,5L0160 | 4013769432261 | 1 |
| 7 | 118YD07L0160 | 4013769432339 | 1 |
| 8 | 118YD08L0160 | 4013769432353 | 1 |
| 9 | 118YD09L0160 | 4013769434562 | 1 |
| 10 | 118YD10L0160 | 4013769432421 | 1 |
| 12 | 118YD12L0160 | 4013769432476 | 1 |
| 14 | 118YD14L0160 | 4013769432551 | 1 |
| 16 | 118YD16L0160 | 4013769432629 | 1 |

L 150x210

| Ø | Ref. | Gencod | Qt. |
|------------|----------------|---------------|-----|
| 6 | 118YD06L0210 | 4013769432315 | 1 |
| 6,5 | 118YD06,5L0210 | 4013769432278 | 1 |
| 8 | 118YD08L0210 | 4013769432360 | 1 |
| 9 | 118YD09L0210 | 4013769434579 | 1 |
| 10 | 118YD10L0210 | 4013769432438 | 1 |
| 12 | 118YD12L0210 | 4013769432483 | 1 |
| 13 | 118YD13L0210 | 4013769432520 | 1 |
| 14 | 118YD14L0210 | 4013769432568 | 1 |
| 16 | 118YD16L0210 | 4013769432636 | 1 |
| 18 | 118YD18L0210 | 4013769432681 | 1 |
| 20 | 118YD20L0210 | 4013769432735 | 1 |

Ø Ref. Gencod Qt.

L 200x260

| Ø | Ref. | Gencod | Qt. |
|------------|----------------|---------------|-----|
| 6 | 118YD06L0260 | 4013769432285 | 1 |
| 6,5 | 118YD06,5L0260 | 4013769432285 | 1 |
| 8 | 118YD08L0260 | 4013769432377 | 1 |
| 10 | 118YD10L0260 | 4013769432445 | 1 |
| 12 | 118YD12L0260 | 4013769432490 | 1 |
| 13 | 118YD13L0260 | 4013769432537 | 1 |
| 14 | 118YD14L0260 | 4013769432575 | 1 |
| 15 | 118YD15L0260 | 4013769432612 | 1 |
| 16 | 118YD16L0260 | 4013769432643 | 1 |
| 18 | 118YD18L0260 | 4013769432698 | 1 |
| 20 | 118YD20L0260 | 4013769432742 | 1 |

L 250x310

| Ø | Ref. | Gencod | Qt. |
|-----------|--------------|---------------|-----|
| 6 | 118YD06L0310 | 4013769434371 | 1 |
| 8 | 118YD08L0310 | 4013769432384 | 1 |
| 10 | 118YD10L0310 | 4013769432452 | 1 |
| 12 | 118YD12L0310 | 4013769432506 | 1 |
| 13 | 118YD13L0310 | 4013769432544 | 1 |
| 14 | 118YD14L0310 | 4013769432582 | 1 |
| 16 | 118YD16L0310 | 4013769432650 | 1 |
| 18 | 118YD18L0310 | 4013769432704 | 1 |
| 20 | 118YD20L0310 | 4013769432759 | 1 |

L 350x410

| | | | |
|----------|--------------|---------------|---|
| 8 | 118YD08L0410 | 4013769432391 | 1 |
|----------|--------------|---------------|---|

Ø Ref. Gencod Qt.

L 400x460

| Ø | Ref. | Gencod | Qt. |
|-----------|--------------|---------------|-----|
| 8 | 118YD08L0460 | 4013769432407 | 1 |
| 10 | 118YD10L0460 | 4013769432469 | 1 |
| 12 | 118YD12L0460 | 4013769432513 | 1 |
| 14 | 118YD14L0460 | 4013769432599 | 1 |
| 16 | 118YD16L0460 | 4013769432667 | 1 |
| 18 | 118YD18L0460 | 4013769432711 | 1 |
| 20 | 118YD20L0460 | 4013769432766 | 1 |
| 22 | 118YD22L0460 | 4013769432780 | 1 |
| 25 | 118YD25L0460 | 4013769432797 | 1 |

L 550x610

| | | | |
|-----------|--------------|---------------|---|
| 10 | 118YD10L0610 | 4013769434388 | 1 |
| 12 | 118YD12L0610 | 4013769434395 | 1 |
| 14 | 118YD14L0610 | 4013769432605 | 1 |
| 16 | 118YD16L0610 | 4013769432674 | 1 |
| 18 | 118YD18L0610 | 4013769432728 | 1 |
| 20 | 118YD20L0610 | 4013769432773 | 1 |

PLASTIC BOX

X 12 PIECES



| Ø | Ref. | Gencod | Qt. |
|------------------|--------------|---------------|-----|
| L 50x110 | | | |
| 5 | 119YD05L0110 | 4013769432804 | 1 |
| 8 | 119YD08L0110 | 4013769432865 | 1 |
| L 100x160 | | | |
| 5 | 119YD05L0160 | 4013769432810 | 1 |
| 6 | 119YD06L0160 | 4013769432827 | 1 |
| 7 | 119YD07L0160 | 4013769432858 | 1 |
| 8 | 119YD08L0160 | 4013769432872 | 1 |
| 10 | 119YD10L0160 | 4013769432919 | 1 |
| 12 | 119YD12L0160 | 4013769432940 | 1 |
| 14 | 119YD14L0160 | 4013769432988 | 1 |
| L 150x210 | | | |
| 6 | 119YD06L0210 | 4013769432834 | 1 |
| 8 | 119YD08L0210 | 4013769432889 | 1 |
| 10 | 119YD10L0210 | 4013769432926 | 1 |
| 12 | 119YD12L0210 | 4013769432957 | 1 |
| 16 | 119YD16L0210 | 4013769433008 | 1 |
| L 200x260 | | | |
| 6 | 119YD06L0260 | 4013769432841 | 1 |
| 8 | 119YD08L0260 | 4013769432896 | 1 |
| 10 | 119YD10L0260 | 4013769432933 | 1 |
| 12 | 119YD12L0260 | 4013769432964 | 1 |
| 14 | 119YD14L0260 | 4013769432995 | 1 |
| L 250x310 | | | |
| 8 | 119YD08L0310 | 4013769432902 | 1 |
| 12 | 119YD12L0310 | 4013769432971 | 1 |
| 16 | 119YD16L0310 | 4013769433015 | 1 |

X 50 PIECES

| Ø | Ref. | Gencod | Qt. |
|------------------|--------------|---------------|-----|
| L 50x110 | | | |
| 5 | 108YD05L0110 | 4013769431639 | 1 |
| 6 | 108YD06L0110 | 4013769431646 | 1 |
| L 100x160 | | | |
| 6 | 108YD06L0160 | 4013769431653 | 1 |
| 8 | 108YD08L0160 | 4013769431660 | 1 |
| 10 | 108YD10L0160 | 4013769431684 | 1 |
| L 200x260 | | | |
| 8 | 108YD08L0260 | 4013769431677 | 1 |



HOLLOW BRICKS COMPATIBLE SDS-PLUS

PERFECT
ROUND

PERFECT
ANCHORING
OF PLUGS



Features

- 120° Positive sharpened carbide tip with self centering point.
- Straight body.
- Short shaped length.
- Compatible SDS-plus shank.



Benefits

- Rotary use only.
- Brick cutting power instead of material destroying.
- Clean and perfect hole when its comes in and comes out.
- The thickness of internal walls of hollow brick stays intact.
- Better anchoring of plugs.



| Ø | Ref. | Gencod | Qt. |
|------------------|-------------|---------------|-----|
| L 200x260 | | | |
| 6 | 117D06L0260 | 4013769432179 | 1 |
| 8 | 117D08L0260 | 4013769432186 | 1 |
| 10 | 117D10L0260 | 4013769432209 | 1 |
| 12 | 117D12L0260 | 4013769432223 | 1 |
| 14 | 117D14L0260 | 4013769434111 | 1 |
| 15 | 117D15L0260 | 4013769434128 | 1 |
| 16 | 117D16L0260 | 4013769434135 | 1 |
| L 250x310 | | | |
| 8 | 117D08L0460 | 4013769432193 | 1 |
| 10 | 117D10L0460 | 4013769432216 | 1 |

CONCRETE 6 CUTTINGS

COMPATIBLE SDS-MAX



LONGER
LIFE TIME

AVOID
RISK OF
BLOKING

Features

- 3 carbide tips with self-centering point.
- 6 cutting edges.
- Progressive flute.
- Compatible SDS-max shank.



Benefits


- Guarantee of perfect round and calibrated hole.
- Longer life time.
- Avoid risk of blocking.

| Ø | Ref. | Gencod | Qt. |
|------------------|--------------|---------------|-----|
| L 200x340 | | | |
| 16 | 166YD16L0340 | 4013769433367 | 1 |
| 18 | 166YD18L0340 | 4013769433381 | 1 |
| 20 | 166YD20L0340 | 4013769433404 | 1 |
| L 400x540 | | | |
| 16 | 166YD16L0540 | 4013769433374 | 1 |
| 18 | 166YD18L0540 | 4013769433398 | 1 |
| 20 | 166YD20L0540 | 4013769433411 | 1 |
| 22 | 166YD22L0540 | 4013769433428 | 1 |
| 24 | 166YD24L0540 | 4013769433435 | 1 |
| 25 | 166YD25L0540 | 4013769433442 | 1 |
| 26 | 166YD26L0540 | 4013769433459 | 1 |
| 28 | 166YD28L0540 | 4013769433466 | 1 |
| 30 | 166YD30L0540 | 4013769433473 | 1 |
| 32 | 166YD32L0540 | 4013769433480 | 1 |
| 35 | 166YD35L0540 | 4013769433497 | 1 |
| 36 | 166YD36L0540 | 4013769433503 | 1 |
| 40 | 166YD40L0540 | 4013769433510 | 1 |
| 42 | 166YD42L0540 | 4013769433527 | 1 |
| 45 | 166YD45L0540 | 4013769433534 | 1 |



HELICAL POINTED CHISEL

FLAT CHISEL

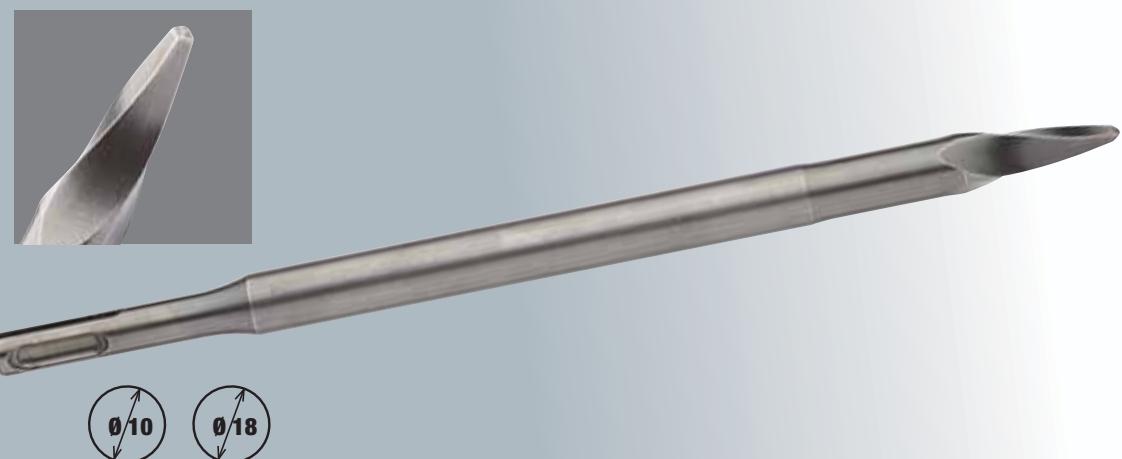

Features


- Helical working head.
- 4 unblocking cutting edges.
- Finish : sandblasted.
- Compatible SDS-plus / SDS-max.



Benefits

- EFFORTLESS DRILLING : Due to its helical head, the pointed chisel penetrates and explodes easily more materials. The user's efforts are minimised in comparison to a classic head form. User comfort is improved.
- ANTI-LOCK : The new helical working head works in half rotation with constante pressure on its 4 cutting edges. Due to its guide and specific geometry which air and dust removal during drilling, it doesn't lock into materials.
- 100% POWERFULL : High temperature heat treatment under controlled atmospheric conditions provides maximum strength which concentrates all the hammer power for a real chiseling performance.

| Ø | Lt | Ref. | Gencod | Qt. |
|----------------------------|-----|--------------|---------------|-----|
| Compatible SDS-plus | | | | |
| 14 | 250 | 322YD14L0250 | 4013769433725 | 1 |
| Compatible SDS-max | | | | |
| 18 | 400 | 342YD18L0400 | 4013769433749 | 1 |
| 18 | 600 | 342YD18L0600 | 4013769433756 | 1 |

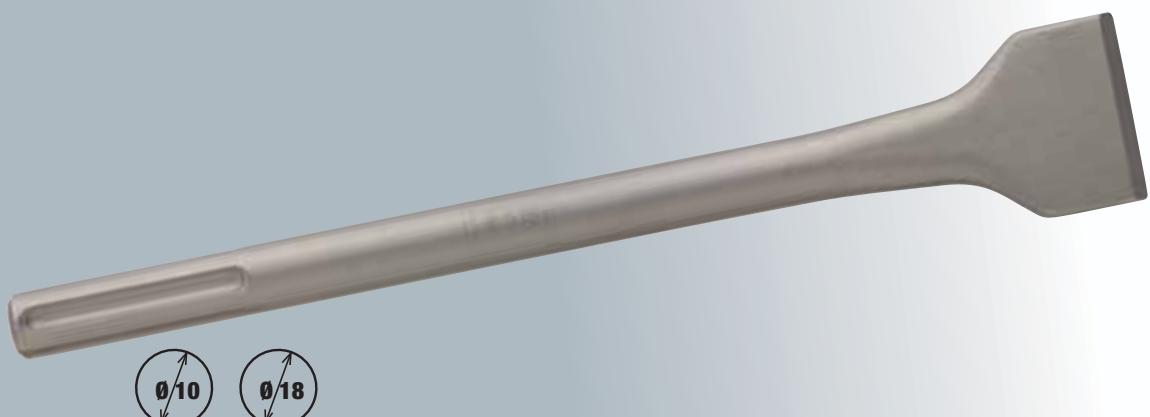

Applications


- For each type of breaking works on concrete and stone.



| Ø | Lt | Ref. | Gencod | Qt. |
|----------------------------|-----|--------------|---------------|-----|
| Compatible SDS-plus | | | | |
| 20 | 250 | 318YL20L0250 | 4013769433701 | 1 |
| 40 | 200 | 318YL40L0200 | 4013769433718 | 1 |
| Compatible SDS-max | | | | |
| 24 | 400 | 343YL24L0400 | 4013769433763 | 1 |

DIAMOND CORE BIT

SPECIAL FOR SANDWARE

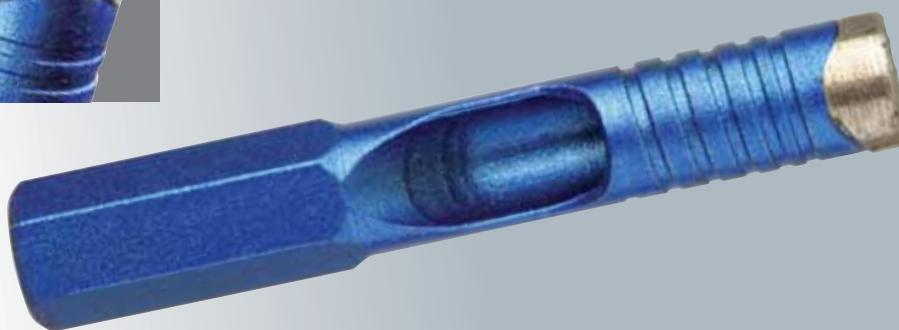

STONEWARE
DRILLING OF
4 & 5 CLASS

HOLES CLEAN
AND WITHOUT
ANY SPLINTERS

Features

- Head with diamond segments.
- Core extraction.
- Hex shank.




Applications

Glaze - Sandstone - Glazed sandstone - Sandware

Terracotta - Marble - Tiles up to 5th class

| Ø | Ref. | Gencod | Qt. |
|------------|-----------|---------------|-----|
| Kit | | | |
| 6 | 426YD06 | 4013769433800 | 1 |
| 6,5 | 426YD06.5 | 4013769433817 | 1 |
| 8 | 426YD08 | 4013769433824 | 1 |
| 10 | 426YD10 | 4013769433831 | 1 |
| 12 | 426YD12 | 4013769433848 | 1 |
| 15 | 426YD15 | 4013769433855 | 1 |
| 20 | 426YD20 | 4013769433862 | 1 |
| 25 | 426YD25 | 4013769433879 | 1 |

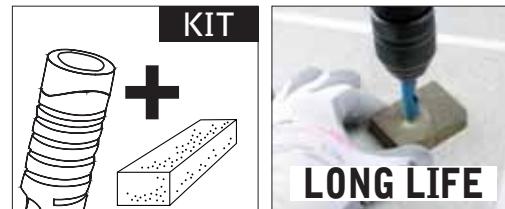

with DRILLER



with GRINDER




CONCRETE DRILL BIT

3 CUTTING EDGES

SELF
CENTERING
TIP

PERFECT
CONCENTRIC
HOLE

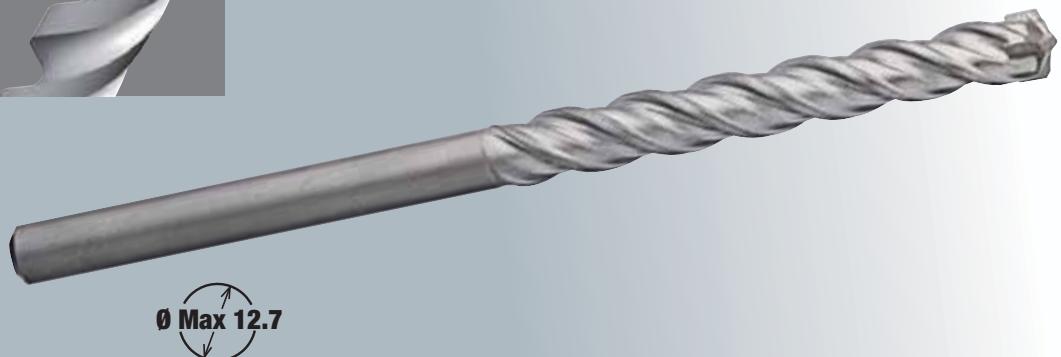


Ø Max 12.7



Features

- Monobloc carbide tip with 3 cutting edges.
- Centering tip 130°.
- 3 shaped flutes.
- Finish : sandblasted.
- Straight shank.

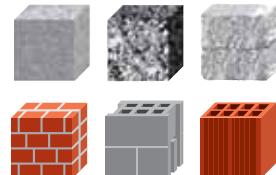

Benefits

- DURABILITY : Improved life time due to a better pressure repartition on the 3 contact points.
- PRECISION : A new innovative 3 edges carbide tip, for a perfect clean and concentric hole.
- PERFORMANCES : Faster and safer due to its improved penetration capacity, which optimizes all fixing types.



| Ø | Ref. | Gencod | Qt. |
|-------------|---------|---------------|-----|
| Short Serie | | | |
| 4 | 263YD04 | 4013769433626 | 1 |
| 5 | 263YD05 | 4013769433633 | 1 |
| 6 | 263YD06 | 4013769433640 | 1 |
| 8 | 263YD08 | 4013769433657 | 1 |
| 10 | 263YD10 | 4013769433664 | 1 |
| 12 | 263YD12 | 4013769433671 | 1 |

PREMIUM STEEL AND CARBIDE FROM GERMANY

95% of the steels and carbide tips come from Germany which guarantee a very high level of quality. The premium standards for steels and carbide tips, combined with a thermal treatment under controlled atmosphere, guarantee the best striking force restitution for our drill bits.

CONCRETE DRILL BIT

SUPER PRO



Ø Max 12.7


INTENSIVE
USE

Features

- Carbide tip with semi-positive shaped.
- "U" shaped flute.
- Finish : black polished.
- Straight shank.

Benefits

- Polish finish with striking appeal permits dust removal.

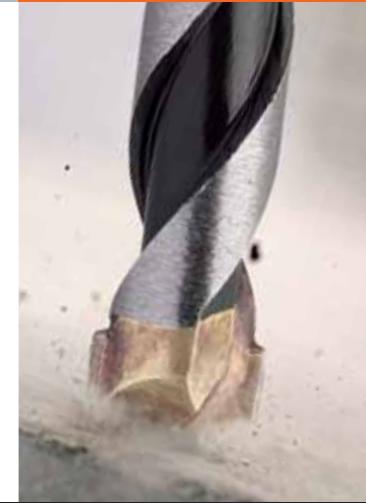

| Ø | Ref. | Gencod | Qt. |
|--------------------|---------|---------------|-----|
| Short Serie | | | |
| 4 | 226YD04 | 4013769439482 | 1 |
| 5 | 226YD05 | 4013769439499 | 1 |
| 6 | 226YD06 | 4013769434142 | 1 |
| 8 | 226YD08 | 4013769434159 | 1 |
| 10 | 226YD10 | 4013769434166 | 1 |
| 12 | 226YD12 | 4013769439505 | 1 |



CONCRETE DRILL BIT

PRO

FAST



Features

- Carbide tip with semi-positive sharpening.
- Double-rolled thread flute with land.
- Sandblasted finish.
- Straight shank.



Benefits

The head design permits faster drilling.




| Ø | Ref. | Gencod | Qt. |
|--------------------|-----------|---------------|-----|
| Short Serie | | | |
| 3 | 264YD03 | 4013769431349 | 1 |
| 4 | 264YD04 | 4013769431356 | 1 |
| 5 | 264YD05 | 4013769431363 | 1 |
| 6 | 264YD06 | 4013769431387 | 1 |
| 6,5 | 264YD06.5 | 4013769433688 | 1 |
| 7 | 264YD07 | 4013769431417 | 1 |
| 8 | 264YD08 | 4013769431424 | 1 |
| 9 | 264YD09 | 4013769431455 | 1 |
| 10 | 264YD10 | 4013769431462 | 1 |
| 11 | 264YD11 | 4013769431493 | 1 |
| 12 | 264YD12 | 4013769431509 | 1 |
| 13 | 264YD13 | 4013769431530 | 1 |
| 14 | 264YD14 | 4013769431547 | 1 |
| 16 | 264YD16 | 4013769431578 | 1 |
| 18 | 264YD18 | 4013769431608 | 1 |
| 20 | 264YD20 | 4013769431615 | 1 |

| Ø | Ref. | Gencod | Qt. |
|--------------|--------------|---------------|-----|
| L 150 | | | |
| 5 | 264YD05L0150 | 4013769431370 | 1 |
| 6 | 264YD06L0150 | 4013769431394 | 1 |
| L 200 | | | |
| 6 | 264YD06L0200 | 4013769431400 | 1 |
| 8 | 264YD08L0200 | 4013769431431 | 1 |
| 10 | 264YD10L0200 | 4013769431479 | 1 |
| 12 | 264YD12L0200 | 4013769431516 | 1 |
| 14 | 264YD14L0200 | 4013769431554 | 1 |
| 16 | 264YD16L0200 | 4013769431585 | 1 |

| Ø | Ref. | Gencod | Qt. |
|--------------|--------------|---------------|-----|
| L 400 | | | |
| 8 | 264YD08L0400 | 4013769431448 | 1 |
| 10 | 264YD10L0400 | 4013769431486 | 1 |
| 12 | 264YD12L0400 | 4013769431523 | 1 |
| 14 | 264YD14L0400 | 4013769431561 | 1 |
| 16 | 264YD16L0400 | 4013769431592 | 1 |




SPECIFIC MULTIMATERIALS



VERSATILE

Features

- Positive sharpening with centering point.
- Angle 118°.
- 4 sharpened edges.
- L shaped flute.
- Straight shank.

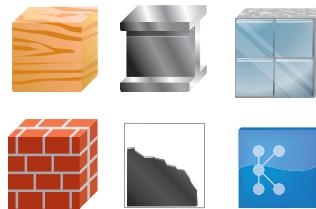

Benefits


- Universal use.
- Perfect clean hole.
- Fast penetration.

| Ø | Ref. | Gencod | Qt. |
|--------------------|---------|---------------|-----|
| Short Serie | | | |
| 4 | 215YD04 | 4013769433558 | 1 |
| 5 | 215YD05 | 4013769433565 | 1 |
| 6 | 215YD06 | 4013769433572 | 1 |
| 8 | 215YD08 | 4013769433589 | 1 |
| 10 | 215YD10 | 4013769433596 | 1 |
| 12 | 215YD12 | 4013769433602 | 1 |



SPECIFIC HARD STONE & GRANIT DRILL BIT

EFFICIENT

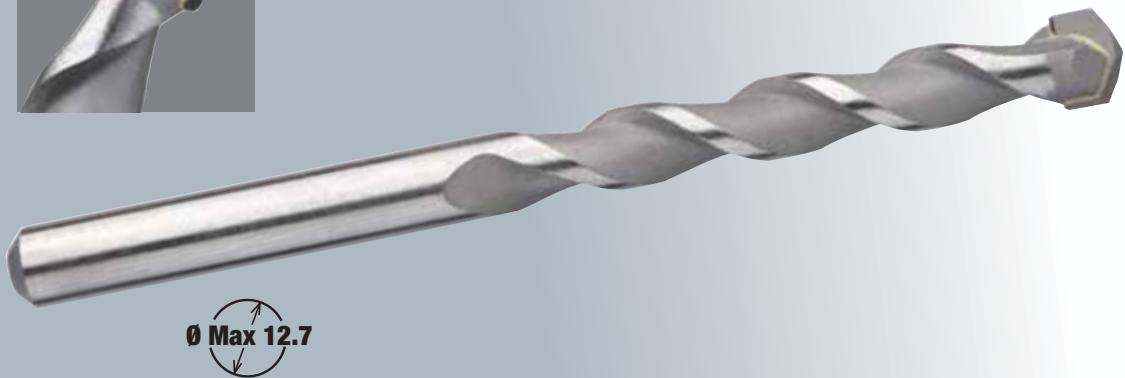

Ø Max 12.7




Features

- Heavy duty carbide tip.
- Positive sharpening.
- L shaped flute.
- Straight shank.



| Ø | Ref. | Gencod | Qt. |
|-------------|---------|---------------|-----|
| Short Serie | | | |
| 4 | 208YD04 | 4013769439512 | 1 |
| 5 | 208YD05 | 4013769439529 | 1 |
| 6 | 208YD06 | 4013769434173 | 1 |
| 8 | 208YD08 | 4013769434180 | 1 |
| 10 | 208YD10 | 4013769434197 | 1 |
| 12 | 208YD12 | 4013769439536 | 1 |

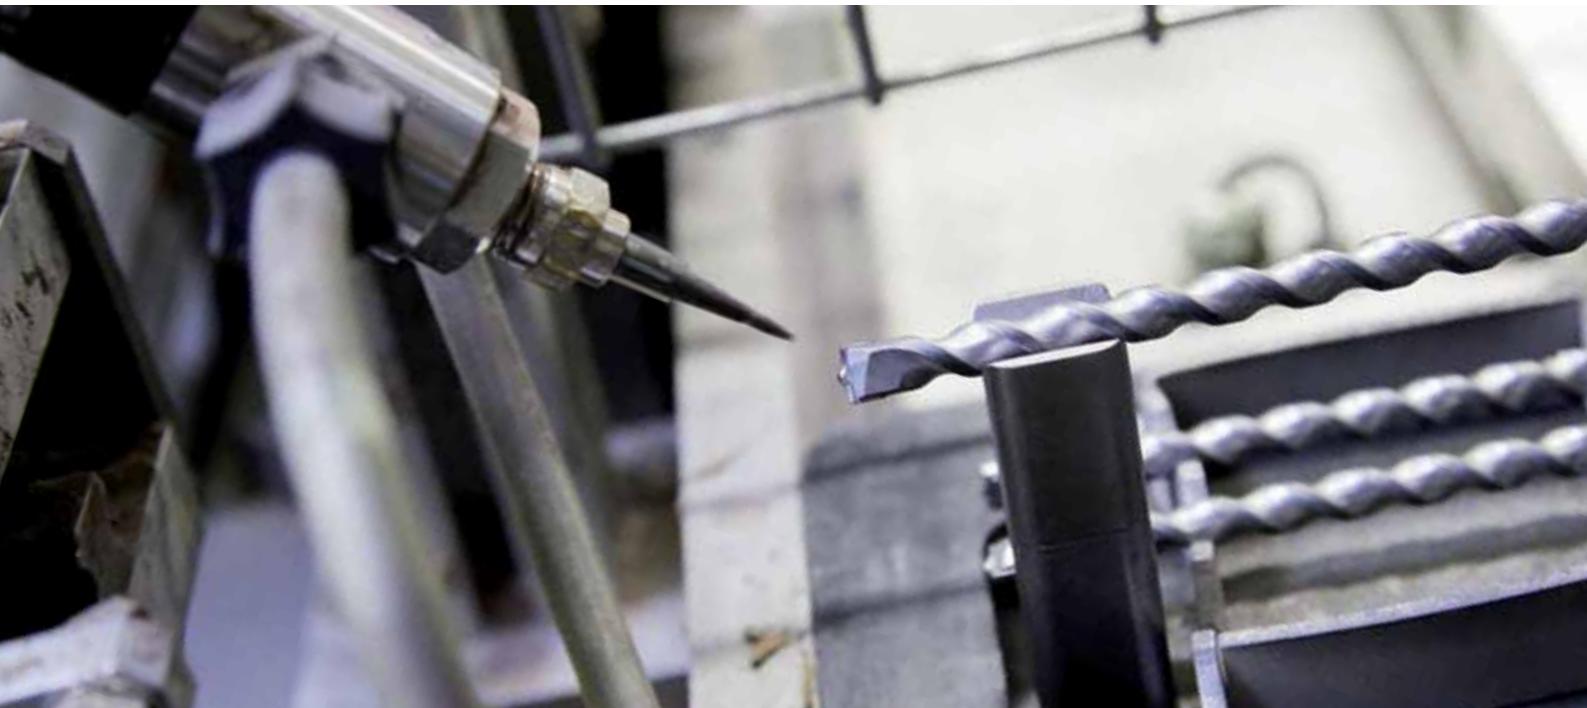

SPECIFIC GLASS & TILE DRILL BIT




Ø Max 12.7

FAST

Features

- New harder carbide grade - Made in Europe.
- 4 sided design "diamond style" with aggressive cutting edges.
- Copper past brazing.
- Fast spiral with tightened pitch.
- Total length improved.
- Shiny / copper finishing.

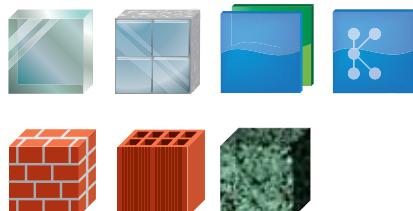


Benefits

- Aggressive tip improves precision and penetration.
- Drilling through up to class 3 ceramic tiles.
- Use dry for easy work.
- Better resistance to high temperature when drilling.
- Speed up dust extraction.
- Ideal for deep materials.
- Whirlwind effect : help to cool down the drill bit.
- Suitable for more materials : non-tempered glass, plastic, composite, brick, marble.
- Identifying design.



| Ø | Ref. | Gencod | Qt. |
|-------------|---------|---------------|-----|
| Short Serie | | | |
| 4 | 400YD04 | 4013769433770 | 1 |
| 6 | 400YD06 | 4013769433787 | 1 |
| 8 | 400YD08 | 4013769433794 | 1 |

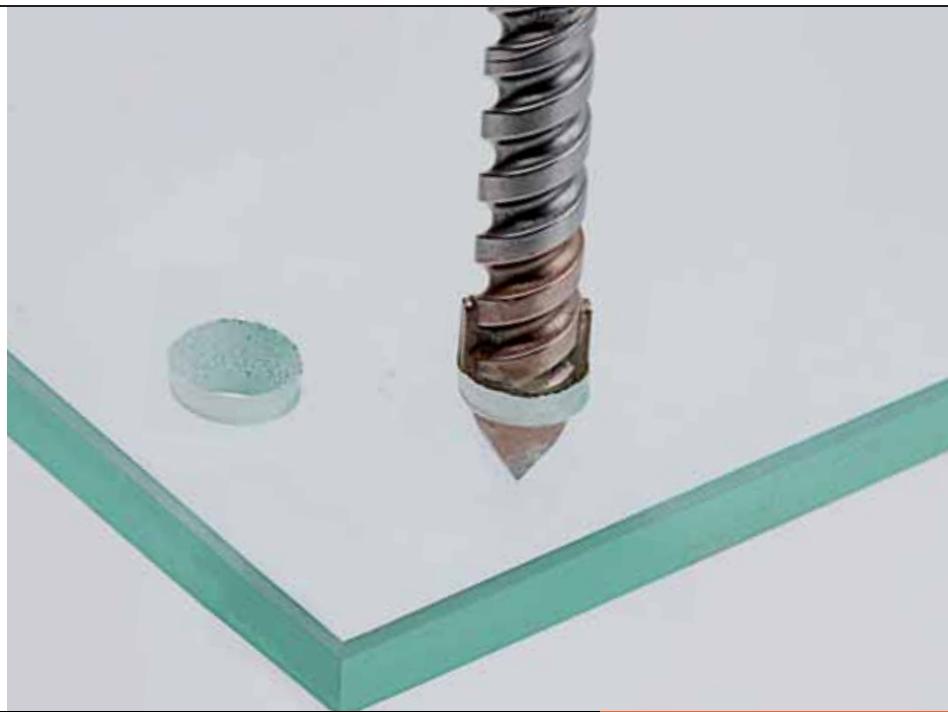

HSS DRILL BIT

HSS-CO COBALT 5%

EFFICIENT



Ø Max 12.7

Features





- Fully ground drill bit 5% cobalt HSS-E.
- 135° tip angle.
- Split point.
- Flute type N.
- Diameter tolerance h8

Benefits

- Starting precision.
- The cobalt content makes the bit harder and heightens temperature resistance, for work with hard metals such as stainless steel.

Applications

- Unalloyed and alloyed steels (up to 1200N/mm²), stainless steel, cast iron.



DIN 338

| Ø | Ref. | Gencod | Qt. |
|-------------|-----------|---------------|-----|
| Short Serie | | | |
| 2 | 700YD02 | 4013769434685 | 10 |
| 2,5 | 700YD02,5 | 4013769434692 | 10 |
| 3 | 700YD03 | 4013769434319 | 10 |
| 3,2 | 700YD03,2 | 4013769434708 | 10 |
| 3,5 | 700YD03,5 | 4013769434715 | 10 |
| 4 | 700YD04 | 4013769434326 | 10 |
| 4,2 | 700YD04,2 | 4013769439543 | 10 |
| 4,5 | 700YD04,5 | 4013769434722 | 10 |
| 4,8 | 700YD04,8 | 4013769434739 | 10 |
| 5 | 700YD05 | 4013769434333 | 10 |
| 5,5 | 700YD05,5 | 4013769434746 | 10 |
| 6 | 700YD06 | 4013769434340 | 10 |
| 7 | 700YD07 | 4013769434753 | 10 |
| 8 | 700YD08 | 4013769434357 | 10 |
| 8,5 | 700YD08,5 | 4013769434760 | 10 |
| 9 | 700YD09 | 4013769434777 | 10 |
| 10 | 700YD10 | 4013769434784 | 10 |
| 11 | 700YD11 | 4013769434791 | 5 |
| 12 | 700YD12 | 4013769434807 | 5 |



HSS DRILL BIT

HSS-G PRO GROUNDED



Ø Max 12.7

FAST

Features

- Fully ground drill bit.
- 118° tip angle.
- Split point.
- Flute type N.
- Diameter tolerance h8.

Benefits

- Starting precision.
- Quick penetration and easy drilling.

Applications

- Unalloyed and alloyed steels (up to 900N/mm²), cast iron.



DIN 338



| Ø | Ref. | Gencod | Qt. |
|--------------------|-----------|---------------|-----|
| Short Serie | | | |
| 2 | 726YD02 | 4013769433886 | 10 |
| 2,5 | 726YD02,5 | 4013769433893 | 10 |
| 3 | 726YD03 | 4013769433909 | 10 |
| 3,2 | 726YD03,2 | 4013769433916 | 10 |
| 3,5 | 726YD03,5 | 4013769434654 | 10 |
| 4 | 726YD04 | 4013769433923 | 10 |
| 4,2 | 726YD04,2 | 4013769433930 | 10 |
| 4,5 | 726YD04,5 | 4013769433947 | 10 |
| 5 | 726YD05 | 4013769433954 | 10 |
| 5,5 | 726YD05,5 | 4013769433961 | 10 |
| 6 | 726YD06 | 4013769433978 | 10 |
| 6,5 | 726YD06,5 | 4013769433985 | 10 |
| 7 | 726YD07 | 4013769433992 | 10 |
| 8 | 726YD08 | 4013769434005 | 10 |
| 8,5 | 726YD08,5 | 4013769434012 | 10 |
| 9 | 726YD09 | 4013769434364 | 10 |
| 10 | 726YD10 | 4013769434029 | 10 |
| 11 | 726YD11 | 4013769434036 | 5 |
| 12 | 726YD12 | 4013769434043 | 5 |
| 13 | 726YD13 | 4013769434050 | 5 |
| 14 | 726YD14 | 4013769434067 | 2 |
| 16 | 726YD16 | 4013769434074 | 2 |
| 18 | 726YD18 | 4013769434661 | 2 |
| 20 | 726YD20 | 4013769434678 | 2 |



HOLE SAW

8% COBALT BI-METAL

CLEAN JOB

EFFICIENT

LONG LIFE




Features

- HSS 8% cobalt Bi-metal.
- Milled and side-set teeth.
- Progressive teeth.

Benefits

- Teeth MILLED : High resistance in Metal. Very long life.
- Teeth SIDE SET : Powerful cuttings. Dust evacuation optimized. Avoid risk of bloking.
- PROGRESSIVE teeth : Universal use. Reduce vibration. Clean hole.



HSS-E
8 % Co

| Ø | Ref. | Gencod | Qt. |
|----|---------|---------------|-----|
| 14 | 650YD14 | 4013769439635 | 1 |
| 16 | 650YD16 | 4013769439666 | 1 |
| 17 | 650YD17 | 4013769439697 | 1 |
| 19 | 650YD19 | 4013769439710 | 1 |
| 20 | 650YD20 | 4013769434241 | 1 |
| 21 | 650YD21 | 4013769439734 | 1 |
| 22 | 650YD22 | 4013769434814 | 1 |
| 23 | 650YD23 | 4013769439758 | 1 |
| 24 | 650YD24 | 4013769439765 | 1 |
| 25 | 650YD25 | 4013769434203 | 1 |
| 27 | 650YD27 | 4013769439772 | 1 |
| 29 | 650YD29 | 4013769439789 | 1 |
| 30 | 650YD30 | 4013769439796 | 1 |
| 32 | 650YD32 | 4013769434227 | 1 |
| 33 | 650YD33 | 4013769439802 | 1 |
| 35 | 650YD35 | 4013769439819 | 1 |
| 37 | 650YD37 | 4013769439826 | 1 |
| 38 | 650YD38 | 4013769434210 | 1 |
| 40 | 650YD40 | 4013769434265 | 1 |
| 41 | 650YD41 | 4013769439833 | 1 |
| 43 | 650YD43 | 4013769439840 | 1 |
| 44 | 650YD44 | 4013769434272 | 1 |
| 46 | 650YD46 | 4013769439857 | 1 |
| 48 | 650YD48 | 4013769439864 | 1 |

| Ø | Ref. | Gencod | Qt. |
|-----|----------|---------------|-----|
| 51 | 650YD51 | 4013769434234 | 1 |
| 52 | 650YD52 | 4013769439871 | 1 |
| 54 | 650YD54 | 4013769439888 | 1 |
| 57 | 650YD57 | 4013769439895 | 1 |
| 58 | 650YD58 | 4013769439901 | 1 |
| 59 | 650YD59 | 4013769439918 | 1 |
| 60 | 650YD60 | 4013769434821 | 1 |
| 64 | 650YD64 | 4013769434258 | 1 |
| 65 | 650YD65 | 4013769439925 | 1 |
| 67 | 650YD67 | 4013769439932 | 1 |
| 68 | 650YD68 | 4013769439949 | 1 |
| 70 | 650YD70 | 4013769434296 | 1 |
| 73 | 650YD73 | 4013769439956 | 1 |
| 76 | 650YD76 | 4013769434302 | 1 |
| 79 | 650YD79 | 4013769439963 | 1 |
| 83 | 650YD83 | 4013769439970 | 1 |
| 86 | 650YD86 | 4013769439987 | 1 |
| 89 | 650YD89 | 4013769439994 | 1 |
| 92 | 650YD92 | 4013769439000 | 1 |
| 95 | 650YD95 | 4013769439017 | 1 |
| 98 | 650YD98 | 4013769439024 | 1 |
| 102 | 650YD102 | 4013769439550 | 1 |
| 105 | 650YD105 | 4013769439567 | 1 |
| 108 | 650YD108 | 4013769439574 | 1 |

| Ø | Ref. | Gencod | Qt. |
|-----|----------|---------------|-----|
| 111 | 650YD111 | 4013769439581 | 1 |
| 114 | 650YD114 | 4013769439598 | 1 |
| 121 | 650YD121 | 4013769439604 | 1 |
| 127 | 650YD127 | 4013769439611 | 1 |
| 133 | 650YD133 | 4013769439628 | 1 |
| 140 | 650YD140 | 4013769439642 | 1 |
| 146 | 650YD146 | 4013769439659 | 1 |
| 152 | 650YD152 | 4013769434289 | 1 |
| 160 | 650YD160 | 4013769439673 | 1 |
| 168 | 650YD168 | 4013769439680 | 1 |
| 177 | 650YD177 | 4013769439703 | 1 |
| 200 | 650YD200 | 4013769439727 | 1 |
| 210 | 650YD210 | 4013769439741 | 1 |

SCREW EXTRACTOR

SCRIBING IRON



Features

- Forged tool.
- High-quality vanadium chromium steel.
- reversed pitch: left-hand pitch.
- Polished finish.
- Square shank.

Benefits

- Ideal for removing screws with broken or damaged heads.

Advises

- Drill the broken screw with the HSS-C 5% cobalt (731-700) or HSS G3 (702-703).
- For the tool holder, use an adjustable tap wrench (part no. 827); use an adjustable spanner for very large diameters and an open-ended spanner or a ratchet spanner for small spaces.



| Nº | Screw to extract | Ø drilling | SW mm | Nº tap wrench | adjustable spanner | Lg | Ref. | Gencod | Pack |
|----|------------------|------------|-------|---------------|--------------------|-----|----------|---------------|------|
| 1 | M3-6 | 2.50 | 3.20 | 1 | yes | 51 | U5000010 | 4013769436955 | BULK |
| 2 | M6-8 | 3 | 4 | 1-2 | yes | 60 | U5000020 | 4013769436962 | BULK |
| 3 | M8-11 | 4.50 | 5.20 | 1-2 | yes | 68 | U5000030 | 4013769436979 | BULK |
| 4 | M11-14 | 6 | 6.40 | 2-3 | yes | 76 | U5000040 | 4013769436986 | BULK |
| 5 | M14-18 | 8 | 8.85 | 3 | yes | 86 | U5000050 | 4013769436993 | BULK |
| 6 | M18-24 | 11 | 11.80 | 3 | yes | 93 | U5000060 | 4013769437006 | BULK |
| 7 | M24-33 | 14 | 15 | - | yes | 96 | U5000070 | 4013769437020 | BULK |
| 8 | M33-50 | 21 | 20 | - | yes | 100 | U5000080 | 4013769437013 | BULK |



Features

- Hexa or rounded scribing irons - diameter 6 mm

Benefits

- For a precise marking on steel



| Lg | Ref. | Gencod | Pack |
|----------------------------------|----------|---------------|------|
| Hex shank scribing iron | | | |
| 140 | U8000000 | 4013769431295 | BULK |
| 140 | U8000001 | 4013769431318 | F |
| Round shank scribing iron | | | |
| 140 | U8080010 | 4013769437037 | BULK |
| 140 | U8080011 | 4013769431332 | F |

SETS

DRILL BIT

TWISTER PLASTIC BOX - 4 PCS

| Composition | Ref. | Gencod |
|---|------|---------------|
| 4 PIECES Ø 5-6-8-10 L160 | 100Y | 4013769431622 |



DEMOLITION SET - METAL BOX - 5PCS

| Composition | Ref. | Gencod |
|---|------|---------------|
| 5 PIECES Point chisel SDS Max Ø18x400 (x2) Flat chisel SDS Max L24x400 (x2) Flat chisel SDS Max L50x360 | 315Y | 4013769433695 |



OPTIMA 3 - PLASTIC BOX - 5 PCS

| Composition | Ref. | Gencod |
|--|------|---------------|
| 5 PIECES Ø 4-5-6-8-10 | 262Y | 4013769433619 |



PRO MASONRY DRILL BIT - PLASTIC BOX - 5 PCS

| Composition | Ref. | Gencod |
|--|------|---------------|
| 5 PIECES Ø 4-5-6-8-10 | 201Y | 4013769433541 |



HSS PRO - METAL BOX - 19 PCS

| Composition | Ref. | Gencod |
|--|------|---------------|
| 19 PIECES Ø 1 - 10 / 0,5 mm | 745Y | 4013769434081 |



HSS PRO - METAL BOX - 25 PCS

| Composition | Ref. | Gencod |
|--|------|---------------|
| 25 PIECES Ø 1 - 13 / 0,5 mm | 747Y | 4013769434098 |



HSS R - METAL BOX - 19 PCS

| Composition | Ref. | Gencod |
|--|------|---------------|
| 19 PIECES Ø 1 - 10 / 0,5 mm | 775Y | 4013769434104 |



HSS R - METAL BOX - 25 PCS

| Composition | Ref. | Gencod |
|--|------|---------------|
| 25 PIECES Ø 1 - 13 / 0,5 mm | 776Y | 4013769434401 |



PACKAGING



MERCHANDISING

A complete and technical range helping users to easily find the right solutions for their needs.



MERCHANDISING



PERCAGE

The data in this catalogue were valid on the date of publishing and are subject to change without notice.
Photographs not binding.



USH
GERMANY

USH Germany GmbH
Glück-Auf-Straße 36
D-57271 Hilchenbach
Germany

Tel: +49 2733 81121 10
Fax: +49 2733 81121 66
info@ush-tools.de
www.ush-tools.com